


Tapered - Aluminum

Tapered round aluminum. Chromated pre-treatment with superior powdercoat finish in black RAL 9004, grey metallic RAL 9007, white RAL 9016 or dark bronze RAL 8019. The shaft is spun tapered from all new seamless 6063 alloy aluminum tubing and heat treated to produce a T6 temper. It is gracefully cone tapered to the butt diameter. Each shaft has a 6"-long straight section at the top that may be drilled to the luminaire manufacturer's mounting specifications. An Aluminum tenon may also be supplied as standard. Cast from A356 alloy aluminum, the anchor base is heat treated to produce a T6 condition and inserted into the anchor base casting. The two pieces are joined by a continuous circumferential weld at the outside top and inside bottom of the anchor base. The anchor bolts and nuts recess in the base casting, sitting flush, and are covered by four (4) tamper-resistant aluminum nut cover discs. Refer to Individual Spec sheets for allowable wind loading (Square Feet) - attached at the bottom.

Specify Product Code

- Specify Pole Top or Tenon: 3"x3" Tenon (-T3x3), 3"x4" Tenon (-T3x4), 3"x4" Tenon (-T3x5), or Pole Cap (-CAP)
- Specify Finish Color: Black (-9004), Grey Metallic (-9007), White (-9016), or Dark Bronze (-8019); (consult WE-EF color chart for others)

SAMPLE: 695-3120-T3x5-9004

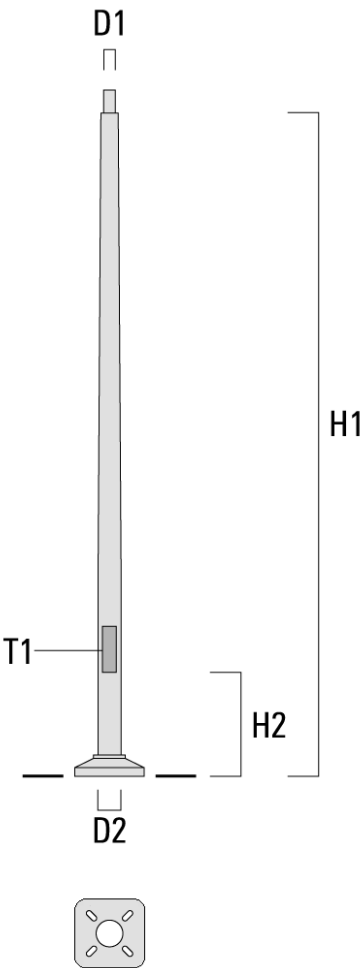

Description	Part ID	D1	D2	DxL1	H1	Spigot	WallThickness	Weight
AML-K-08-30/40-125	693-3310	3	4		7 ft 8 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.13	17
AML-K-10-30/50-125	693-3311	3	5		9 ft 8 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.13	24
AML-K-12-30/50-156	693-3324	3	5		11 ft 8 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø	0.16	31

Tapered - Aluminum

					3.5 x 7.87/Ø 4.25 x 7.87		
AML-K-12-30/50-188	693-3312	3	5	11 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	36
AML-K-14-30/50-156	693-3325	3	5	13 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.16	37
AML-K-14-30/50-188	693-3313	3	5	13 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	43
AML-K-16-30/50-188	693-3314	3	5	15 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	50
AML-K-16-40/60-156	693-3326	4	6	15 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.16	53
AML-K-16-40/60-188	693-3315	4	6	15 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	62
AML-K-18-30/50-188	693-3327	3	5	17 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	56
AML-K-18-40/60-188	693-3316	4	6	17 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	70
AML-K-18-40/70-156	693-3317	4	7	17 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.16	66
AML-K-20-40/60-188	693-3328	4	6	19 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø	0.19	74

Tapered - Aluminum

					3.5 x 7.87/Ø 4.25 x 7.87		
AML-K-20-40/70-156	693-3318	4	7	19 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.16	73
AML-K-23-40/70-156	693-3329	4	7	22 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.16	77
AML-K-23-45/80-156	693-3319	4.50	8	22 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.16	87
AML-K-23-45/80-188	693-3320	4.50	8	22 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	102
AML-K-25-45/80-156	693-3330	4.50	8	24 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.16	96
AML-K-25-45/80-188	693-3321	4.50	8	24 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	113
AML-K-28-45/80-188	693-3322	4.50	8	27 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	124
AML-K-28-45/80-250	693-3331	4.50	8	27 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.25	161
AML-K-28-60/10-188	693-3323	6	10	27 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.19	161
AML-K-29-60/10-250	693-3332	6	10	27 ft 8 in	Ø 3. x 3.15/Ø 3. x 5.12/Ø 3. x 7.87/Ø 3.5 x 7.87/Ø 4.25 x 7.87	0.25	217

Tapered - Aluminum

					3.5 x 7.87/ Ø 4.25 x 7.87		
AML-K-30-60/10-188	693-3333	6	10	29 ft 8 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.19	175
AML-K-33-60/10-188	693-3335	6	10	32 ft 8 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.19	191
AML-K-33-60/10-250	693-3336	6	10	32 ft 8 in	Ø 3. x 3.15/ Ø 3. x 5.12/ Ø 3. x 7.87/ Ø 3.5 x 7.87/ Ø 4.25 x 7.87	0.25	257
AML-K-23-45/80-156	693-3419	4.50	8	272	Ø 3. x 3.15 + Ø 4. x 3.15	0.16	87
AML-K-23-45/80-188	693-3420	4.50	8	272	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	102
AML-K-25-45/80-156	693-3430	4.50	8	296	Ø 3. x 3.15 + Ø 4. x 3.15	0.16	96
AML-K-25-45/80-188	693-3421	4.50	8	296	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	113
AML-K-28-45/80-188	693-3422	4.50	8	332	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	124
AML-K-28-45/80-250	693-3431	4.50	8	332	Ø 3. x 3.15 + Ø 4. x 3.15	0.25	161
AML-K-28-60/10-188	693-3423	6	10	332	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	161
AML-K-29-60/10-250	693-3432	6	10	332	Ø 3. x 3.15 + Ø 4. x 3.15	0.25	217
AML-K-30-60/10-188	693-3433	6	10	356	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	175
AML-K-30-60/10-250	693-3434	6	10	356	Ø 3. x 3.15 + Ø 4. x 3.15	0.25	235
AML-K-33-60/10-188	693-3435	6	10	392	Ø 3. x 3.15 + Ø 4. x 3.15	0.19	191
AML-K-33-60/10-250	693-3436	6	10	392	Ø 3. x 3.15 + Ø 4. x 3.15	0.25	257

Tapered - Aluminum

AML-V-16-55-188	693-3617	5.5	ø 2.38 x 3.94/ ø 1.66 x 3.94	16 ft 6 in	0.19	55
-----------------	----------	-----	---------------------------------	------------	------	----