


Tapered - Galvanised Steel

Tubular steel, tapered, seamless. Hot dipped galvanised inside and out. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole. Chrome-free conversion coating superior powdercoat finish in RAL colour is available up to a maximum length of $H + E < 9,3$ m.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

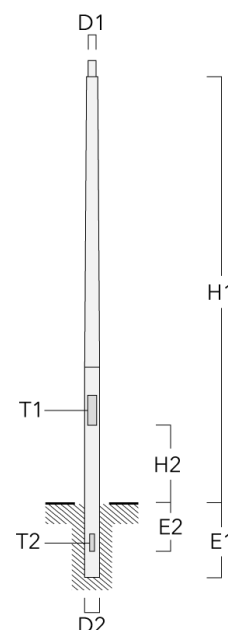


Description	Part ID	D1	D2	E1	E2	H1	H2	Spigot	T1	T2	Weight
AM-K-K 40	240-0628	102	133	800	500	4000	600	Ø 76 x 130	90 x 400	50 x 150	35
AM-K-K 45	240-0629	102	133	800	500	4500	600	Ø 76 x 130	90 x 400	50 x 150	38
AM-K-K 50	240-0630	102	168	800	500	5000	600	Ø 76 x 130	90 x 400	50 x 150	43
AM-K-K 60	240-0631	102	168	1000	500	6000	600	Ø 76 x 130	90 x 400	50 x 150	58
AM-K-K 70	240-0632	102	168	1200	500	7000	600	Ø 76 x 130	90 x 400	50 x 150	79
AM-K-K 75	240-0633	102	168	1200	500	7500	600	Ø 76 x 130	90 x 400	50 x 150	84
AM-K-K 80	240-0634	102	168	1200	500	8000	600	Ø 76 x 130	90 x 400	50 x 150	119
AM-K-K 90	240-0635	102	168	1400	500	9000	600	Ø 76 x 130	90 x 400	50 x 150	135
AM-K-K 100	240-0636	102	168	1500	500	10000	600	Ø 76 x 130	90 x 400	50 x 150	186


Mounting Accessories

KSM Anti corrosion sleeve

Description	Part ID	D2	H1
Anti corrosion sleeve KSM100	300-0790	89-114	450

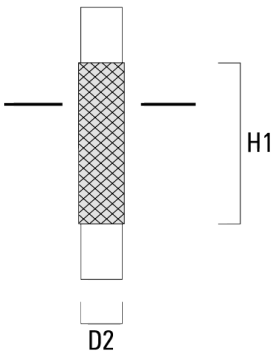


Anti corrosion sleeve KSM115	300-0321	120	450
------------------------------	----------	-----	-----

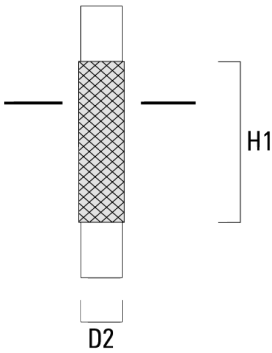


Tapered - Galvanised Steel

Description	Part ID	D2	H1
Anti corrosion sleeve KSM125	300-0791	133-140	450

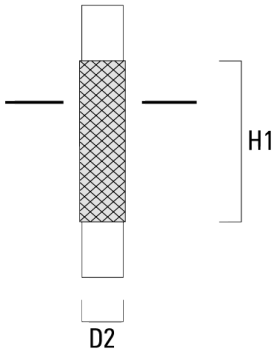


Anti corrosion sleeve KSM160	300-0325	152-168	450
------------------------------	----------	---------	-----

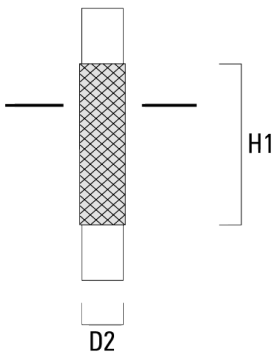


Tapered - Galvanised Steel

Description	Part ID	D2	H1
Anti corrosion sleeve KSM200	300-0329	168-219	450

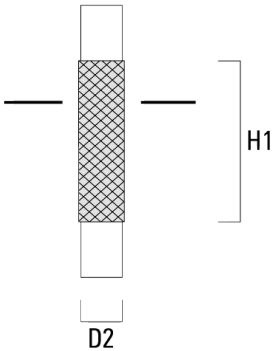


Anti corrosion sleeve KSM230	300-0331	220-230	450
------------------------------	----------	---------	-----

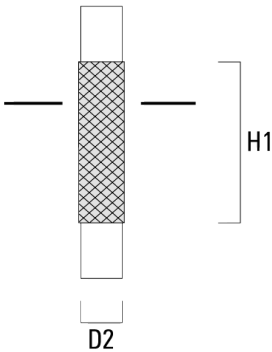


Tapered - Galvanised Steel

Description	Part ID	D2	H1
Anti corrosion sleeve KSM315	300-1019	290-340	450

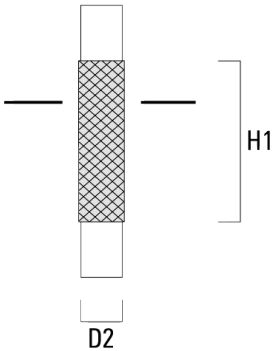


KST Cable protection			
Description	Part ID	T1	
Cable protection KST150	300-0323	50 x 150	



GP Base plate	
Description	Part ID

FP Flange plate


Description	Part ID	D1	D2	H1	M1
Flange plate FP	430-5030	400	300	15	30




Electrical Accessories

SD Socket

Description	Part ID	A	B	D1	Weight (kg)
Socket SD1 (Ø 76)	405-0025	95	70	76	0.35

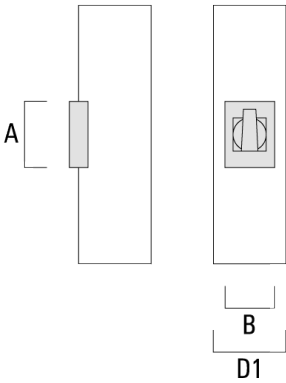


Socket SD1 (Ø 89)	405-0026	95	70	89	0.35
-------------------	----------	----	----	----	------

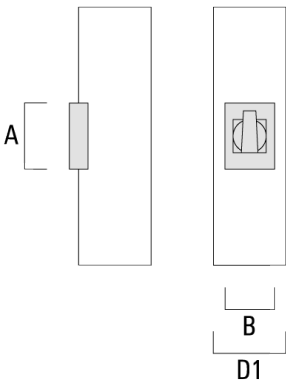


Tapered - Galvanised Steel

Description	Part ID	A	B	D1	Weight (kg)
Socket SD1 (Ø 108)	405-0028	95	70	108	0.35

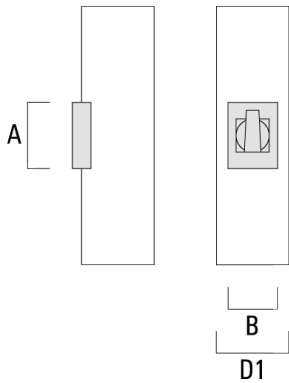


Socket SD1 (Ø 133)	405-0033	95	70	133	0.35
--------------------	----------	----	----	-----	------

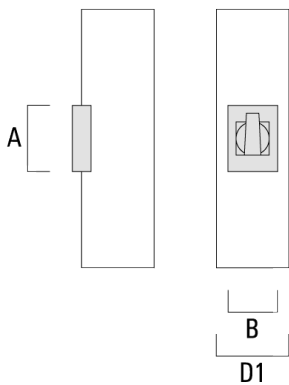


Tapered - Galvanised Steel

Description	Part ID	A	B	D1	Weight (kg)
Socket SD1 (Ø 160)	405-0035	95	70	160	0.35

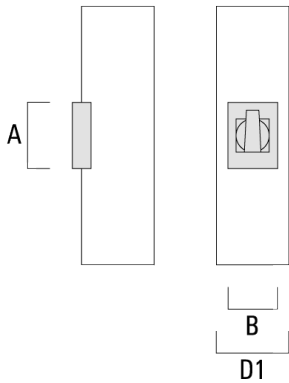


SD10, ~230V/16,00 A - CEE (Ø 108)	405-0032	95	70	108	0.35
-----------------------------------	----------	----	----	-----	------

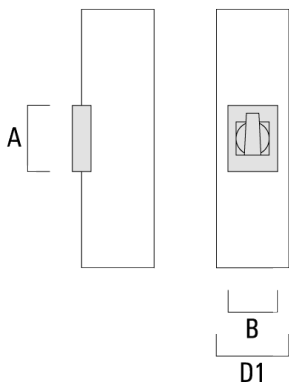


Tapered - Galvanised Steel

Description	Part ID	A	B	D1	Weight (kg)
SD10, ~230V/16,00 A - CEE (Ø 160)	405-0088	95	70	160	0.35

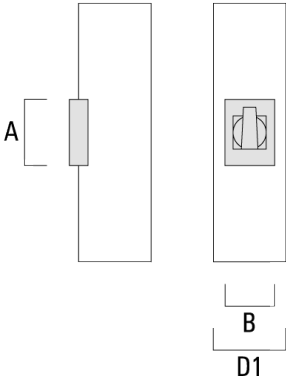


EK Connecting box

Description	Part ID	A	B	C1
Connecting box EK70	405-0078	160	58	57



Tapered - Galvanised Steel

Description	Part ID	A	B	C1
Connecting box EK80	405-0112	235	78	65



Connecting box EK82	405-0113	275	84	72
---------------------	----------	-----	----	----

