


Tapered - Galvanised Steel

Tubular steel, tapered, seamless. Hot dipped galvanised inside and out. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole. Chrome-free conversion coating superior powdercoat finish in RAL colour is available up to a maximum length of $H + E < 9,3$ m.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

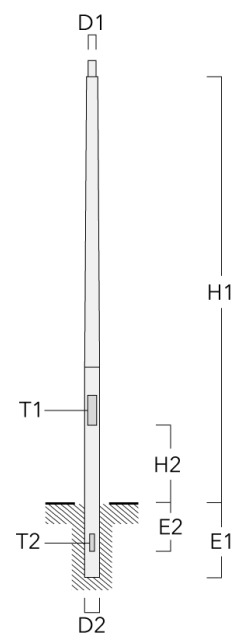

Beschreibung	Artikelnummer	D1	D2	E1	E2	H1	H2	Spigot	T1	T2	Weight
AM-K-K 40	240-0628	102	133	800	500	4000	600	Ø 76 x 130	90 x 400	50 x 150	35
AM-K-K 45	240-0629	102	133	800	500	4500	600	Ø 76 x 130	90 x 400	50 x 150	38
AM-K-K 50	240-0630	102	168	800	500	5000	600	Ø 76 x 130	90 x 400	50 x 150	43
AM-K-K 60	240-0631	102	168	1000	500	6000	600	Ø 76 x 130	90 x 400	50 x 150	58
AM-K-K 70	240-0632	102	168	1200	500	7000	600	Ø 76 x 130	90 x 400	50 x 150	79
AM-K-K 75	240-0633	102	168	1200	500	7500	600	Ø 76 x 130	90 x 400	50 x 150	84
AM-K-K 80	240-0634	102	168	1200	500	8000	600	Ø 76 x 130	90 x 400	50 x 150	119
AM-K-K 90	240-0635	102	168	1400	500	9000	600	Ø 76 x 130	90 x 400	50 x 150	135
AM-K-K 100	240-0636	102	168	1500	500	10000	600	Ø 76 x 130	90 x 400	50 x 150	186