


**Tapered - Galvanised Steel**

Tubular steel, tapered, seamless. Hot dipped galvanised inside and out. Service door with stainless locking screw. Suitable for one cable connecting box. Standard version with planted root and cable entry hole. Chrome-free conversion coating superior powdercoat finish in RAL colour is available up to a maximum length of  $H + E < 9,3$  m.

Please specify RAL colour reference number according to the WE-EF RAL Colour Chart.

Special version with surface mounting flange plate is available on request.

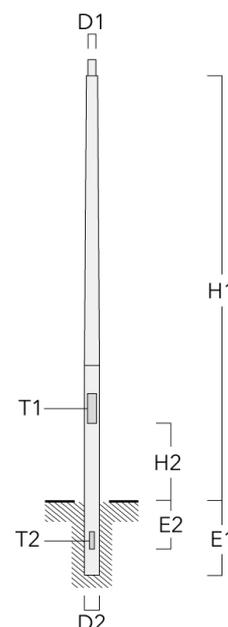

| Description | Référence | D1  | D2  | E1   | E2  | H1    | H2  | Spigot     | T1       | T2       | Weight |
|-------------|-----------|-----|-----|------|-----|-------|-----|------------|----------|----------|--------|
| AM-K-K 40   | 240-0628  | 102 | 133 | 800  | 500 | 4000  | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 35     |
| AM-K-K 45   | 240-0629  | 102 | 133 | 800  | 500 | 4500  | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 38     |
| AM-K-K 50   | 240-0630  | 102 | 168 | 800  | 500 | 5000  | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 43     |
| AM-K-K 60   | 240-0631  | 102 | 168 | 1000 | 500 | 6000  | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 58     |
| AM-K-K 70   | 240-0632  | 102 | 168 | 1200 | 500 | 7000  | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 79     |
| AM-K-K 75   | 240-0633  | 102 | 168 | 1200 | 500 | 7500  | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 84     |
| AM-K-K 80   | 240-0634  | 102 | 168 | 1200 | 500 | 8000  | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 119    |
| AM-K-K 90   | 240-0635  | 102 | 168 | 1400 | 500 | 9000  | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 135    |
| AM-K-K 100  | 240-0636  | 102 | 168 | 1500 | 500 | 10000 | 600 | Ø 76 x 130 | 90 x 400 | 50 x 150 | 186    |