


□ 262

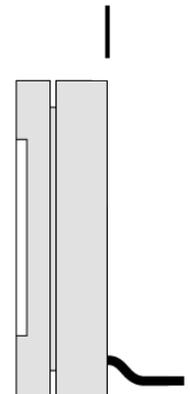

80

**Description**

IP55, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket.

Polycarbonate main lens. Two cable entries. Integral EC electronic converter.

## Specifications

### Material description

---

Body Marine-grade, die-cast aluminium alloy

Lens Polycarbonate lens

Colours

**RAL9004**

Signal black

**RAL9006**

White aluminium

**RAL9016**

Traffic white

**RAL7016**

Anthracite grey

**RAL9007**

Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Corrosion resistance 5CE

---

### Electrical description

---

Power supply 220-240V / 50-60 Hz

Driver / Ballast Polycarbonate lens

---

### Additional information

## Options

Light distribution   Colour temperature   Nominal Watt

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
--------------------	---------	--------------	--------------	-------------------	-----