


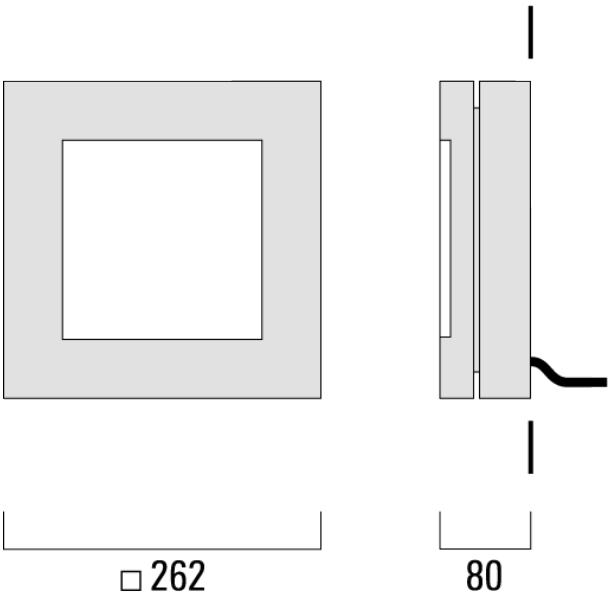

Description

IP55, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Integral EC electronic converter.

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Polycarbonate lens			
Colours	RAL9004	RAL9006	RAL9016	RAL7016
	Signal black	White aluminium	Traffic white	Anthracite grey
	RAL9007			
	Grey aluminium			
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Corrosion resistance	5CE			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Polycarbonate lens

Additional information

Options

Light distribution Colour temperature Nominal Watt

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
--------------------	---------	--------------	--------------	-------------------	-----