




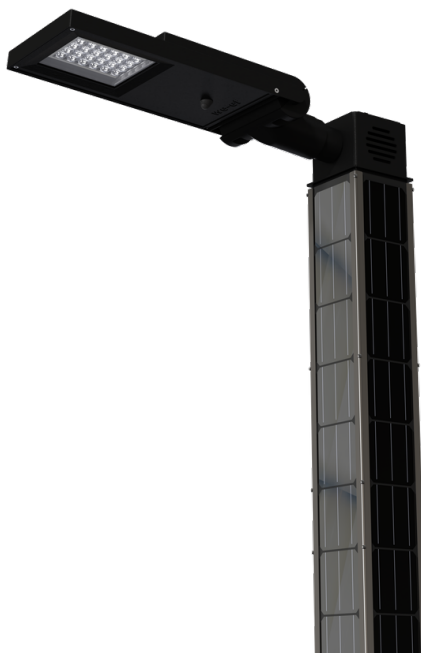

Description

Ready to Solar. IP66, Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. CCG® Controlled Compression Gasket. Non-reflective flat safety glass cover, hinged. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board with an integrated 24 VDC driver, dimmable from 1-10 V via the control unit in the solar column. The luminaire is factory-sealed and does not need to be opened during installation.

Please note: The SM-Q65 solar column is available as an accessory and must be ordered separately. See accessories.

Contact WE-EF direct or your local WE-EF sales representative for an individual solution designed to precisely meet your needs.



Spécifications

Description du matériel

Corps	Marine-grade, die-cast aluminium alloy
Lentille	Non-reflective flat safety glass
Couleurs	RAL7016 Gris anthracite
Joint	CCG® Controlled Compression Gasket
Visserie	PCS Polymer Coated Stainless Steel Hardware
IP	IP66
IK	IK08
Protection contre la corrosion	5CE

Description électrique

Driver	Built-in 24 V DC driver, dimmable from 1-10 V via the control unit in the solar column
--------	--

Informations complémentaires

Options

Distribution de la lumière	Température de couleur	Données en sortie de luminaire
 [S70] Éclairage routier	 3000K	36 W
 [R60] Rectangulaire du "avant"		
 [P65] Symétrique - piétons et pistes cyclables		
 [A60] Asymétrique		

Configurations

Distribution de la lumière	Référence	Source lumineuse	Rated lumens	Rated input power	IRC
 [A60] Asymétrique	102-1044	LED-24/36W/3000K	4854.6 lm	36 W	80
 [P65] Symétrique - piétons et pistes cyclables	102-1043	LED-24/36W/3000K	4901.9 lm	36 W	80
 [R60] Rectangulaire du "avant"	102-1042	LED-24/36W/3000K	4703.3 lm	36 W	80
 [S70] Éclairage routier	102-1041	LED-24/36W/3000K	4849.9 lm	36 W	80