Ceiling Luminaires

DAS140-PM TW LED

IP66, Class I. IK07. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 0.5 - 1.5 m. To be specified at time at ordering. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. Tunable White Technology. The luminaire is factory-sealed and does not need to be opened during installation.

Other standardised housing lengths available on request.

Cable	IP66 / IK07
Variant	IP / IK

Lighting

Light distribution Colour temperature Wattage

Physical description

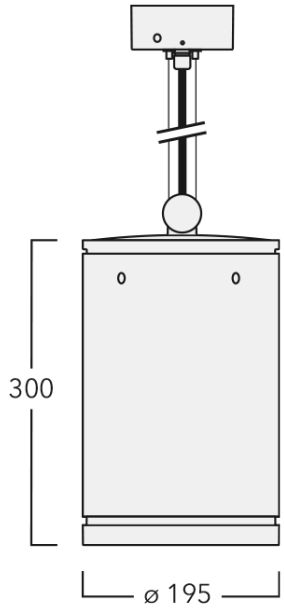

Height	300 mm
Diameter	195 mm
Weight	5.5 kg
Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colours	**RAL9004** Signal black; **RAL9007** Grey aluminium; **RAL7016** Anthracite grey; **RAL9016** Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Mounting	Ceiling mount through canopy, drop guard through wire rope. Factory sealed till canopy. Cable suspension 0.5 m, ceiling mount through canopy. Longer cable suspension available on request
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Driver / Ballast	DALI
Cable	Two cable entries on canopy for trough wiring
Energy efficiency	C-D (Light source)

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI

Ceiling Luminaires

DAS140-PM TW LED

we-ef

A Fagerhult Group Company

WE-EF LIGHTING (Thailand) Co., Ltd.
57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn
Phone: +66 2 738 96 20
Fax: +66 2 738 96 29
https://we-ef.com/asia

Subject to technical changes and errors.