Surface-Mounted Wall Luminaires

DLG239 LED

IP55, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

Version with emergency lighting on request.

28 W	1458 – 1585 lm	IP55 / IK10
Wattage	Rated lumens	IP / IK

Lighting

Light distribution	Colour temperature	Wattage
[]	2700K	28 W
	3000K	
	4000K	

Physical description

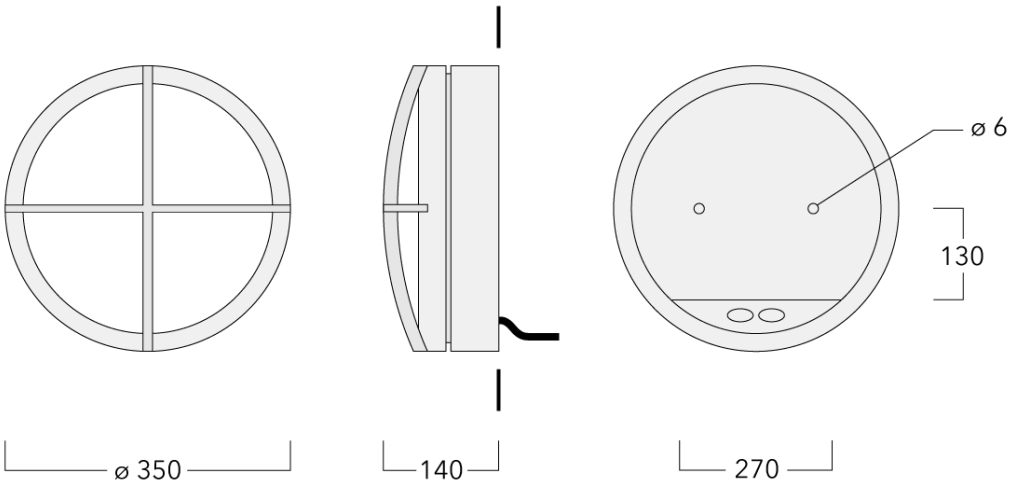

Diameter	350 mm
Weight	3.6 kg
Body	Marine-grade die-cast aluminium alloy
Lens	Polycarbonate lens
Colours	RAL9004 Signal black; RAL9006 White aluminium; RAL9016 Traffic white; RAL7016 Anthracite grey; RAL9007 Grey aluminium
Finish	Powdercoat finish in RAL7016, RAL9004, RAL9006, RAL9007 and RAL9016
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Cable	Two cable entries
Surge protection	1/2 kV
Energy efficiency	D (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	195-0896	LED-FT-28W/2700K	1457.7 lm	31 W	80
	195-9539	LED-FT-28W/3000K	1518.3 lm	31 W	80
	195-9540	LED-FT-28W/4000K	1585.2 lm	31 W	80

Surface-Mounted Wall Luminaires

DLG239 LED

we-ef

A Fagerhult Group Company

Fagerhult Lighting Ltd
33-34 Dolben Street, SE1 0UQ London, United Kingdom
https://we-ef.com/uk

Subject to technical changes and errors.