






#### Description

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Two cable entries.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output.

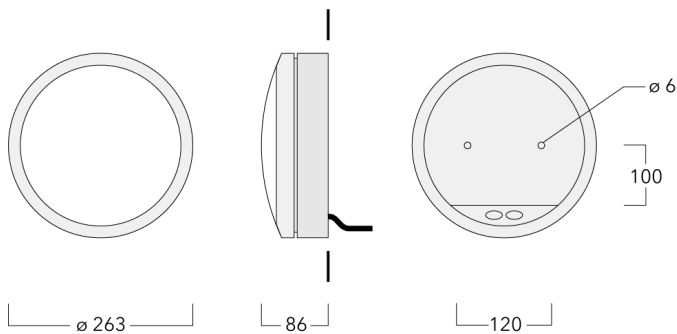

## Specifications

### Material description

---

Lens	Polycarbonate lens		
Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium
Gasket	Silicone rubber gasket		
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)		
Ingress protection	IP55		
Impact resistance	IK10		
Corrosion resistance	5CE+Primer		

---

### Electrical description

---

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

---

### Additional information

---

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------

---

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**

[]



3000K

17 W



4000K



2700K

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[]	195-0893	LED-1/17W/2700K	1346.2 lm	17 W	80
	195-9521	LED-1/17W/3000K	1408.2 lm	17 W	80
	195-9522	LED-1/17W/4000K	1467.8 lm	17 W	80