




#### Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. CCG® gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries. Optional 2200 K version available. To be specified at time of ordering.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

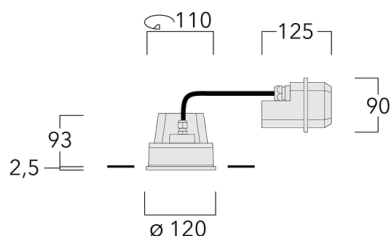

## Specifications

### Material description

---

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	<b>RAL9004</b> Signal black	<b>RAL9016</b> Traffic white	<b>RAL7016</b> Anthracite grey	<b>RAL9007</b> Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

---

### Electrical description

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

---

### Additional information

---

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

---

**Options**

**Light distribution**



[B] symmetric, wide beam



[M] symmetric, medium beam



[EE] symmetric, very narrow beam



[EES] symmetric, very narrow beam, sharp cut-off

**Colour temperature**



3000K



4000K







2700K

**Nominal Watt**

12 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	134-1907	LED-6/12W/2700K	1254.2 lm	12 W	80
	134-1625	LED-6/12W/3000K	1347.1 lm	12 W	80
	134-1626	LED-6/12W/4000K	1440 lm	12 W	80
[B] symmetric, wide beam					
	134-1909	LED-6/12W/2700K	1393.3 lm	12 W	80
	134-1631	LED-6/12W/3000K	1496.5 lm	12 W	80
	134-1632	LED-6/12W/4000K	1599.7 lm	12 W	80
[EE] symmetric, very narrow beam					
	134-1910	LED-6/12W/2700K	1499.6 lm	12 W	80
	134-1633	LED-6/12W/3000K	1610.7 lm	12 W	80
	134-1634	LED-6/12W/4000K	1721.8 lm	12 W	80
[EES] symmetric, very narrow beam, sharp cut-off					
	134-1908	LED-6/12W/2700K	1407.5 lm	12 W	80
	134-1627	LED-6/12W/3000K	1511.8 lm	12 W	80
	134-1628	LED-6/12W/4000K	1616.1 lm	12 W	80
[M] symmetric, medium beam					