




Description

DOC110 LED for remodel projects. For new construction, see DOC110 LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

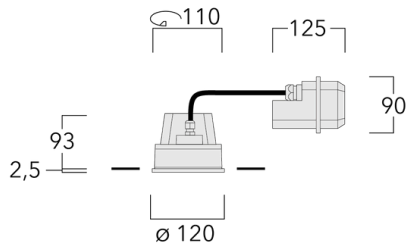

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	RAL9004	RAL9016	RAL8019	RAL9007
	Signal black	Traffic white	Grey brown	Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description

Power supply	Integral 120-277V/0-10V dimming driver
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information

Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

Options

Light distribution



[W] bi-symmetric, wide beam



[M] symmetric, medium beam



[VN] symmetric, very narrow beam



[VNS] symmetric, very narrow beam, sharp cut-off



[B] symmetric, wide beam



[EE] symmetric, very narrow beam



[EES] symmetric, very narrow beam, sharp cut-off

Color temperature

Nominal Watt



3000K









4000K




2700K

12 W

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
	134-1907	LED-6/12W/2700K	1254.2 lm	12 W	80
[B] symmetric, wide beam					
	134-1909	LED-6/12W/2700K	1393.3 lm	12 W	80
[EE] symmetric, very narrow beam					
	134-1910	LED-6/12W/2700K	1499.6 lm	12 W	80
[EES] symmetric, very narrow beam, sharp cut-off					
	134-1908	LED-6/12W/2700K	1407.5 lm	12 W	80
	134-1627_us	LED-6/12W/3000K	1511.8 lm	12 W	80
	134-1628_us	LED-6/12W/4000K	1616.1 lm	12 W	80
[M] symmetric, medium beam					
	134-1631_us	LED-6/12W/3000K	1496.5 lm	12 W	80
	134-1632_us	LED-6/12W/4000K	1599.7 lm	12 W	80
[VN] symmetric, very narrow beam					
	134-1633_us	LED-6/12W/3000K	1610.7 lm	12 W	80
	134-1634_us	LED-6/12W/4000K	1721.8 lm	12 W	80
[VNS] symmetric, very narrow beam, sharp cut-off					
	134-1625_us	LED-6/12W/3000K	1347.1 lm	12 W	80

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p data-bbox="81 525 357 558">[W] bi-symmetric, wide beam</p>	134-1626_us	LED-6/12W/4000K	1440 lm	12 W	80
