




Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. CCG® gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries. Optional 2200 K version available. To be specified at time of ordering.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

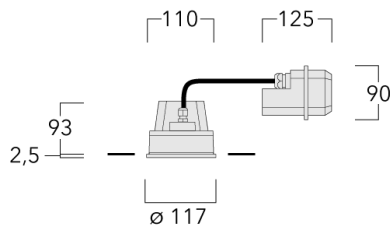

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	RAL9004	RAL9016	RAL7016	RAL9007
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Options**Light distribution Colour temperature Nominal Watt**

[B]



3000K

12 W



[M]



4000K



[EE]







2700K



[EES]

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	134-1907	LED-6/12W/2700K	1254.2 lm	12 W	80
	134-1625	LED-6/12W/3000K	1347.1 lm	12 W	80
	134-1626	LED-6/12W/4000K	1440 lm	12 W	80
[B]					
	134-1909	LED-6/12W/2700K	1393.3 lm	12 W	80
	134-1631	LED-6/12W/3000K	1496.5 lm	12 W	80
	134-1631	LED-6/12W/3000K	1496.5 lm	12 W	80
	134-1632	LED-6/12W/4000K	1599.7 lm	12 W	80
[EE]					
	134-1910	LED-6/12W/2700K	1499.6 lm	12 W	80
	134-1633	LED-6/12W/3000K	1610.7 lm	12 W	80
	134-1633	LED-6/12W/3000K	1610.7 lm	12 W	80
	134-1634	LED-6/12W/4000K	1721.8 lm	12 W	80
[EES]					
	134-1908	LED-6/12W/2700K	1407.5 lm	12 W	80
	134-1908	LED-6/12W/2700K	1407.5 lm	12 W	80
	134-1627	LED-6/12W/3000K	1511.8 lm	12 W	80
	134-1627	LED-6/12W/3000K	1511.8 lm	12 W	80
	134-1628	LED-6/12W/4000K	1616.1 lm	12 W	80
	134-1628	LED-6/12W/4000K	1616.1 lm	12 W	80
[M]					