


**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. CCG® gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries. Optional 2200 K version available. To be specified at time of ordering.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

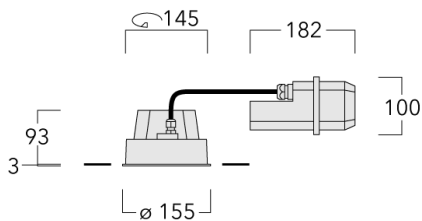

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy			
Colours	<b>RAL9004</b> Signal black	<b>RAL9016</b> Traffic white	<b>RAL7016</b> Anthracite grey	<b>RAL9007</b> Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV
Energy efficiency	C-D (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

## Options

### Light distribution



[B] symmetric, wide beam



[M] symmetric, medium beam



[EE] symmetric, very narrow beam




[EES] symmetric, very narrow beam, sharp cut-off

### Colour temperature



3000K



4000K







2700K

### Nominal Watt

24 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	134-1911	LED-12/24W/2700K	2522.3 lm	24 W	80
	134-1737	LED-12/24W/3000K	2709.2 lm	24 W	80
	134-1738	LED-12/24W/4000K	2896 lm	24 W	80
[B] symmetric, wide beam					
	134-1913	LED-12/24W/2700K	2684.8 lm	24 W	80
	134-1741	LED-12/24W/3000K	2883.7 lm	24 W	80
	134-1742	LED-12/24W/4000K	3082.5 lm	24 W	80
[EE] symmetric, very narrow beam					
	134-1914	LED-12/24W/2700K	2865.6 lm	24 W	80
	134-1743	LED-12/24W/3000K	3077.9 lm	24 W	80
	134-1744	LED-12/24W/4000K	3290.2 lm	24 W	80
[EES] symmetric, very narrow beam, sharp cut-off					
	134-1912	LED-12/24W/2700K	2791.8 lm	24 W	80
	134-1739	LED-12/24W/3000K	2998.6 lm	24 W	80
	134-1740	LED-12/24W/4000K	3205.4 lm	24 W	80
[M] symmetric, medium beam					