




Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. CCG® gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries. Optional 2200 K version available. To be specified at time of ordering.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

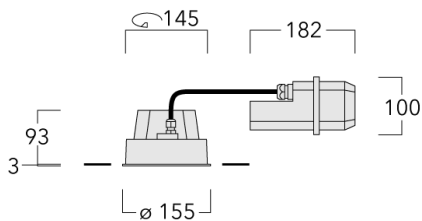

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Colours	RAL9004 Signal black	RAL9016 Traffic white	RAL7016 Anthracite grey	RAL9007 Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV
Energy efficiency	C-D (Light source)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Options**Light distribution Colour temperature Nominal Watt**

[B]




3000K

24 W



[M]



4000K



[EE]








2700K



[EES]

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	134-1911	LED-12/24W/2700K	2522.3 lm	24 W	80
	134-1737	LED-12/24W/3000K	2709.2 lm	24 W	80
	134-1738	LED-12/24W/4000K	2896 lm	24 W	80
[B]					
	134-1913	LED-12/24W/2700K	2684.8 lm	24 W	80
	134-1741	LED-12/24W/3000K	2883.7 lm	24 W	80
	134-1741	LED-12/24W/3000K	2883.7 lm	24 W	80
[EE]					
	134-1742	LED-12/24W/4000K	3082.5 lm	24 W	80
	134-1742	LED-12/24W/4000K	3082.5 lm	24 W	80
	134-1914	LED-12/24W/2700K	2865.6 lm	24 W	80
[EES]					
	134-1743	LED-12/24W/3000K	3077.9 lm	24 W	80
	134-1743	LED-12/24W/3000K	3077.9 lm	24 W	80
	134-1744	LED-12/24W/4000K	3290.2 lm	24 W	80
[M]					
	134-1744	LED-12/24W/4000K	3290.2 lm	24 W	80
	134-1912	LED-12/24W/2700K	2791.8 lm	24 W	80
	134-1739	LED-12/24W/3000K	2998.6 lm	24 W	80
	134-1739	LED-12/24W/3000K	2998.6 lm	24 W	80
	134-1740	LED-12/24W/4000K	3205.4 lm	24 W	80
	134-1740	LED-12/24W/4000K	3205.4 lm	24 W	80