


Description

DOC140-FT TW LED for remodel projects. For new construction, see DOC140-FT TW LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral driver in thermally separated compartment. Darklight anodized aluminum reflector for superior illumination and glare control. Factory-installed LED circuit board. Tunable White technology. DMX Interface.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

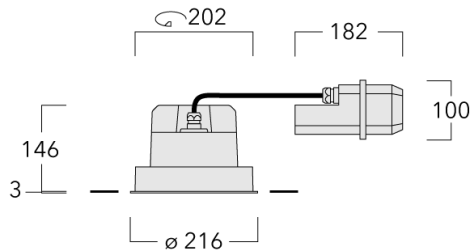

Specifications

Material description

Colors	RAL9004 Signal black	RAL9007 Grey aluminium	RAL9016 Traffic white	RAL8019 Grey brown
Ingress protection	IP66			
Impact resistance	IK07			




Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	DMX
Energy efficiency	E (Light source)




Additional information

Listings	ETL listed. Suitable for wet locations. IC rated (for insulated ceilings).
Lifetime	Ta=25°/40° L70B50 > 50000h

Options

Light distribution	Color temperature	Nominal Watt
 [W] bi-symmetric, wide beam	2700-6000K	24 W
 [M] symmetric, medium beam		
 [N] bi-symmetric, narrow beam		

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[M] symmetric, medium beam</p>	134-1812_us	LED-2/24W/2700-6000K	1826.2 lm	24 W	80
 <p>[N] bi-symmetric, narrow beam</p>	134-1814_us	LED-2/24W/2700-6000K	946.5 lm	24 W	80
 <p>[W] bi-symmetric, wide beam</p>	134-1810_us	LED-2/24W/2700-6000K	1856.5 lm	24 W	80