


### Description

DOC140-FT TW LED for remodel projects. For new construction, see DOC140-FT TW LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral driver in thermally separated compartment. Darklight anodized aluminum reflector for superior illumination and glare control. Factory-installed LED circuit board. Tunable White technology. DMX Interface.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)  
+ XXX-XXXX (Accessory 1)

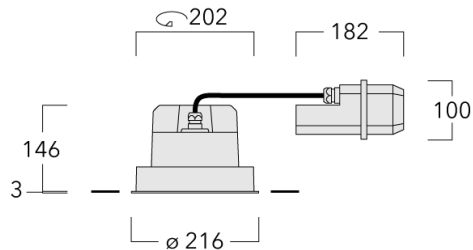

## Specifications

### Material description

Colors	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL9016</b> Traffic white	<b>RAL8019</b> Grey brown
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	DMX
Energy efficiency	E (Light source)

### Additional information

Diameter (inches)	8.50
Listings	ETL listed. Suitable for wet locations. IC rated (for insulated ceilings).
Lifetime	Ta=25°/40° L70B50 > 50000h

**Options**

**Light distribution**    **Color temperature**    **Nominal Watt**



[B]

2700-6000K

24 W






[M]



[E]

**Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[B]</p>	134-1810	LED-1/24W/2700-6000K	1856.5 lm	24 W	80
 <p>[E]</p>	134-1814	LED-1/24W/2700-6000K	946.5 lm	24 W	80
 <p>[M]</p>	134-1812	LED-1/24W/2700-6000K	1826.2 lm	24 W	80