


Description

DOC140 LED for new construction. For remodel projects, see DOC140 LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
 Example: XXX-XXXX - 9004 (Black)
 + XXX-XXXX (Accessory 1)

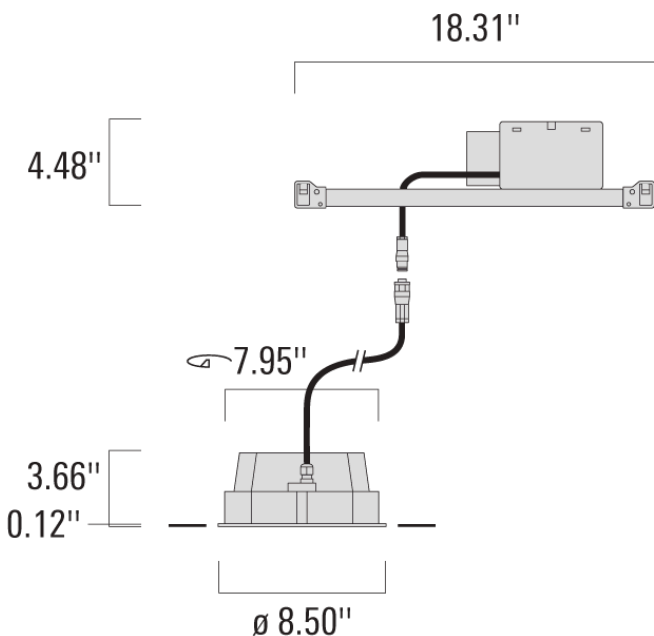

Specifications







Material description

Colors	 Signal black	 Grey aluminium	 Traffic white	 Grey brown
Ingress protection	IP66			
Impact resistance	IK07			





Electrical description

Additional information

Options

Light distribution	Color temperature	Nominal Watt
 [VN] symmetric, very narrow beam	 3000K	48 W
 [VNS] symmetric, very narrow beam, sharp cut-off	 4000K	
 [M] symmetric, medium beam		
 [W] bi-symmetric, wide beam		

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
	134-6404_us	LED-24/48W/3000K	5128.8 lm	48 W	80
	134-6405_us	LED-24/48W/4000K	5128.8 lm	48 W	80
[M] symmetric, medium beam					
	134-6400_us	LED-24/48W/3000K	5077 lm	48 W	80
	134-6401_us	LED-24/48W/4000K	5077 lm	48 W	80
[VN] symmetric, very narrow beam					
	134-6402_us	LED-24/48W/3000K	5464.3 lm	48 W	80
	134-6403_us	LED-24/48W/4000K	5464.3 lm	48 W	80
[VNS] symmetric, very narrow beam, sharp cut-off					
	134-6406_us	LED-24/48W/3000K	4570.2 lm	48 W	80
	134-6407_us	LED-24/48W/4000K	4570.2 lm	48 W	80
[W] bi-symmetric, wide beam					