


**Description**

DOC140 LED for new construction. For remodel projects, see DOC140 LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)  
+ XXX-XXXX (Accessory 1)

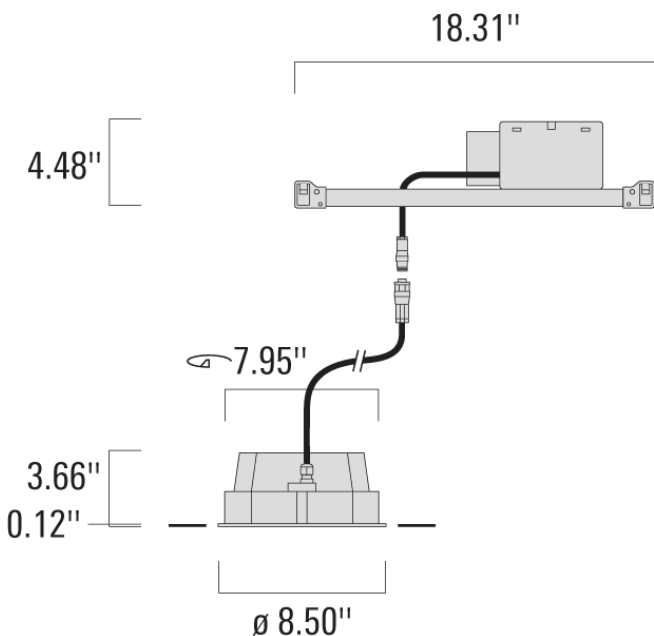

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	<b>RAL9004</b>	<b>RAL9007</b>	<b>RAL9016</b>	<b>RAL8019</b>
	Signal black	Grey aluminium	Traffic white	Grey brown
Gasket	Silicone CCG® Controlled Compression Gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			







### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment





### Additional information

Listings	Contact WE-EF USA for ETL/UL certification status.
Lifetime	Ta=25°/40° L90B10 > 90000h

**Options**

Light distribution	Color temperature	Nominal Watt
 [VN] symmetric, very narrow beam	 3000K	48 W
 [VNS] symmetric, very narrow beam, sharp cut-off	 4000K	
 [M] symmetric, medium beam		
 [W] bi-symmetric, wide beam		

**Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
	134-6404_us	LED-24/48W/3000K	5128.8 lm	48 W	80
	134-6405_us	LED-24/48W/4000K	5128.8 lm	48 W	80
[M] symmetric, medium beam					
	134-6400_us	LED-24/48W/3000K	5077 lm	48 W	80
	134-6401_us	LED-24/48W/4000K	5077 lm	48 W	80
[VN] symmetric, very narrow beam					
	134-6402_us	LED-24/48W/3000K	5464.3 lm	48 W	80
	134-6403_us	LED-24/48W/4000K	5464.3 lm	48 W	80
[VNS] symmetric, very narrow beam, sharp cut-off					
	134-6406_us	LED-24/48W/3000K	4570.2 lm	48 W	80
	134-6407_us	LED-24/48W/4000K	4570.2 lm	48 W	80
[W] bi-symmetric, wide beam					