


**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone rubber gasket.

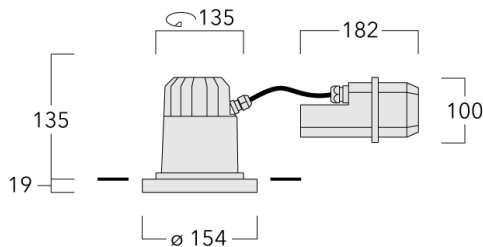

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Anodised aluminium reflector with PMMA diffuser. Two cable entries.

Pre-installation blockout is recommended for mounting in cast concrete ceilings, available on request.

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens, hinged			
Colours	RAL9004	RAL9016	RAL7016	RAL9007
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV
Energy efficiency	D (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options


Light distribution **Colour temperature** **Nominal Watt**



[BD]



3000K




4000K



2700K

24 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [BD]	134-1939	LED-1/24W/2700K	2335.8 lm	24 W	80
	134-1483	LED-1/24W/3000K	2433.8 lm	24 W	80
	134-1484	LED-1/24W/4000K	2537.7 lm	24 W	80