Ceiling Luminaires

DOC220 LED Stainless Steel

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code – Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Fixed	18 W	2884 – 3290 lm
Variant	Wattage	Delivered lumens

Lighting

Light distribution

[VNS] symmetric, very narrow beam, sharp cut-off

[VN] symmetric, very narrow beam

[M] symmetric, medium beam

Color temperature

3000K

4000K

Wattage

18 W

Physical description

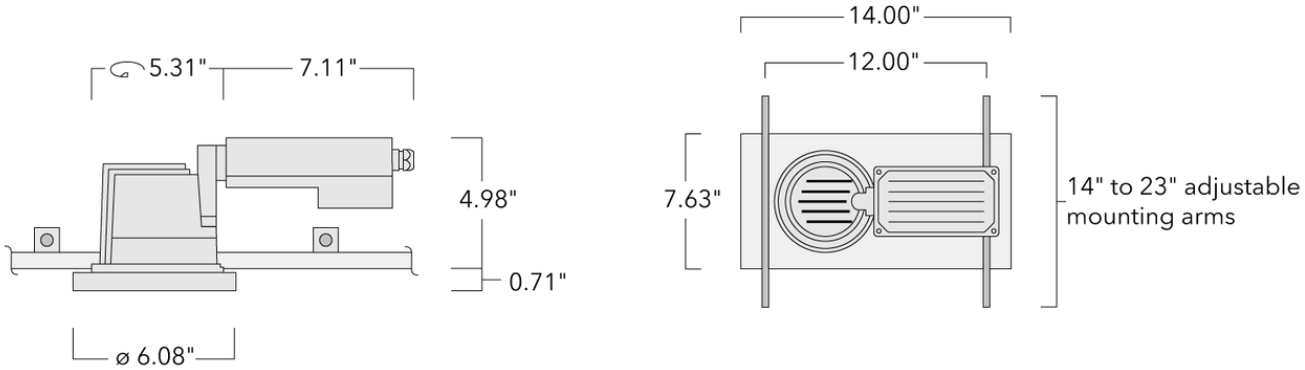

Depth	3.98 in
Diameter	6.06 in
Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	Stainless Steel
Finish	Natural stainless steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Mounting	Suitable for installation in non-insulated ceiling, using galvanized mounting tray and hanger bars. Maximum ceiling thickness 1.5 in.
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Additional information

Listings	ETL listed. Suitable for wet applications.
Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
[M] symmetric, medium beam	134-6115	LED-12/18W/3000K	2998.6 lm	27 W	80
[VN] symmetric, very narrow beam	134-6116	LED-12/18W/3000K	2883.7 lm	27 W	80
	134-6126	LED-12/18W/4000K	3082.5 lm	27 W	80
[VNS] symmetric, very narrow beam, sharp cut-off	134-6123	LED-12/18W/4000K	3290.2 lm	27 W	80

Ceiling Luminaires

DOC220 LED Stainless Steel

we-ef

A Fagerhult Group Company

WE-EF LIGHTING USA, LLC
410-D Keystone Drive, 15086 Warrendale, PA 15086
Phone: +1 724 742 0030
customersupport.usa@we-ef.com
https://we-ef.com/us

Subject to technical changes and errors.