






#### Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone rubber gasket.

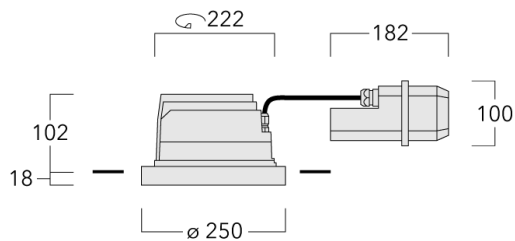

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens, hinged			
Colours	<b>RAL9004</b>	<b>RAL9016</b>	<b>RAL7016</b>	<b>RAL9007</b>
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV
Energy efficiency	C-D (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

**Options****Light distribution    Colour temperature    Nominal Watt**

[B]




3000K

48 W



[M]



4000K



[EE]







2700K



[EES]

**Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	134-1935	LED-24/48W/2700K	5016.9 lm	48 W	80
	134-1396	LED-24/48W/3000K	5388.5 lm	48 W	80
	134-1397	LED-24/48W/4000K	5760.1 lm	48 W	80
[B]					
	134-1937	LED-24/48W/2700K	5573.3 lm	48 W	80
	134-1400	LED-24/48W/3000K	5986.1 lm	48 W	80
	134-1400	LED-24/48W/3000K	5986.1 lm	48 W	80
	134-1401	LED-24/48W/4000K	6398.9 lm	48 W	80
[EE]					
	134-1401	LED-24/48W/4000K	6398.9 lm	48 W	80
	134-1938	LED-24/48W/2700K	5998.4 lm	48 W	80
	134-1402	LED-24/48W/3000K	6442.7 lm	48 W	80
	134-1402	LED-24/48W/3000K	6442.7 lm	48 W	80
	134-1403	LED-24/48W/4000K	6887 lm	48 W	80
[EES]					
	134-1403	LED-24/48W/4000K	6887 lm	48 W	80
	134-1936	LED-24/48W/2700K	5630.1 lm	48 W	80
	134-1398	LED-24/48W/3000K	6047.2 lm	48 W	80
	134-1398	LED-24/48W/3000K	6047.2 lm	48 W	80
	134-1399	LED-24/48W/4000K	6464.2 lm	48 W	80
[M]					
	134-1399	LED-24/48W/4000K	6464.2 lm	48 W	80