


Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Pre-installation blockout is recommended for mounting in cast concrete ceilings, available on request.

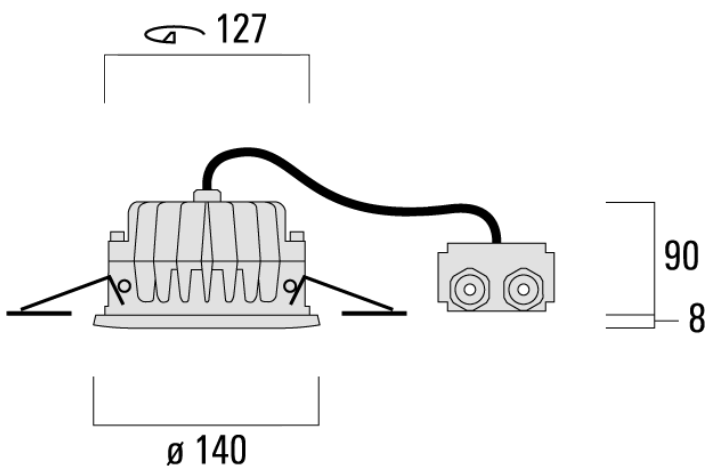

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy								
Lens	Safety glass lens								
Colours	<table><tr><td>RAL9004</td><td>RAL9016</td><td>RAL7016</td><td>RAL9007</td></tr><tr><td>Signal black</td><td>Traffic white</td><td>Anthracite grey</td><td>Grey aluminium</td></tr></table>	RAL9004	RAL9016	RAL7016	RAL9007	Signal black	Traffic white	Anthracite grey	Grey aluminium
RAL9004	RAL9016	RAL7016	RAL9007						
Signal black	Traffic white	Anthracite grey	Grey aluminium						
Gasket	Silicone CCG® Controlled Compression Gasket								
Fasteners	PCS hardware								
Corrosion resistance	5CE								





Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---




Additional information

Options

Light distribution

	[M] symmetric, medium beam
	[EE] symmetric, very narrow beam
	[B] symmetric, wide beam
	[EES] symmetric, very narrow beam, sharp cut-off





Colour temperature

	3000K
	4000K
	2700K

Nominal Watt

12 W
18 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [B] symmetric, wide beam	135-9026	LED-6/12W/2700K	1069.1 lm	12 W	80
	135-9008	LED-6/12W/3000K	1148.3 lm	12 W	80
	135-9009	LED-6/12W/4000K	1227.5 lm	12 W	80
	135-9076	LED-6/18W/2700K	1924.9 lm	18 W	80
	135-9016	LED-6/18W/3000K	2018.8 lm	18 W	80
	135-9019	LED-6/18W/4000K	2112.7 lm	18 W	80
 [EE] symmetric, very narrow beam	135-9024	LED-6/12W/2700K	1297.3 lm	12 W	80
	135-9004	LED-6/12W/3000K	1393.4 lm	12 W	80
	135-9007	LED-6/12W/4000K	1489.5 lm	12 W	80
	135-9078	LED-6/18W/2700K	2064.9 lm	18 W	80
	135-9018	LED-6/18W/3000K	2165.6 lm	18 W	80
	135-9021	LED-6/18W/4000K	2266.4 lm	18 W	80
 [EES] symmetric, very narrow beam, sharp cut-off	135-9025	LED-6/12W/2700K	1390 lm	12 W	80
	135-9010	LED-6/12W/3000K	1492.9 lm	12 W	80
	135-9011	LED-6/12W/4000K	1595.9 lm	12 W	80
 [M] symmetric, medium beam	135-9023	LED-6/12W/2700K	1353.8 lm	12 W	80
	135-9003	LED-6/12W/3000K	1454.1 lm	12 W	80
	135-9006	LED-6/12W/4000K	1554.3 lm	12 W	80
	135-9077	LED-6/18W/2700K	2066.4 lm	18 W	80
	135-9017	LED-6/18W/3000K	2167.2 lm	18 W	80
	135-9020	LED-6/18W/4000K	2268 lm	18 W	80