
**Description**

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

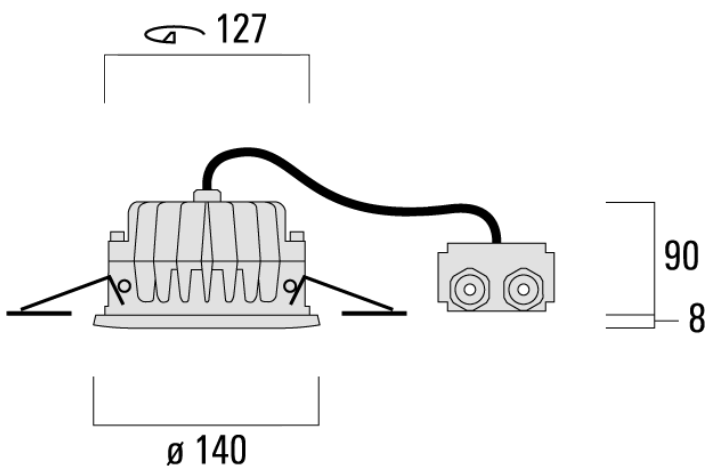

## Specifications

### Material description

---

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	<b>RAL9004</b> Signal black	<b>RAL9016</b> Traffic white	<b>RAL7016</b> Anthracite grey	<b>RAL9007</b> Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket			
Fasteners	PCS hardware			
Corrosion resistance	5CE			

---

### Electrical description








---

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---





---

### Additional information

**Options****Light distribution    Colour temperature    Nominal Watt**

 [M]	 3000K	12 W 18 W
 [EE]	 4000K	
 [B]	 2700K	
 [EES]		

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [B]	135-9026	LED-6/12W/2700K	1069.1 lm	12 W	80
	135-9008	LED-6/12W/3000K	1148.3 lm	12 W	80
	135-9009	LED-6/12W/4000K	1227.5 lm	12 W	80
	135-9076	LED-6/18W/2700K	1924.9 lm	18 W	80
	135-9016	LED-6/18W/3000K	2018.8 lm	18 W	80
	135-9019	LED-6/18W/4000K	2112.7 lm	18 W	80
 [EE]	135-9024	LED-6/12W/2700K	1297.3 lm	12 W	80
	135-9004	LED-6/12W/3000K	1393.4 lm	12 W	80
	135-9007	LED-6/12W/4000K	1489.5 lm	12 W	80
	135-9078	LED-6/18W/2700K	2064.9 lm	18 W	80
	135-9018	LED-6/18W/3000K	2165.6 lm	18 W	80
	135-9021	LED-6/18W/4000K	2266.4 lm	18 W	80
 [EES]	135-9025	LED-6/12W/2700K	1390 lm	12 W	80
	135-9010	LED-6/12W/3000K	1492.9 lm	12 W	80
	135-9011	LED-6/12W/4000K	1595.9 lm	12 W	80
 [M]	135-9023	LED-6/12W/2700K	1353.8 lm	12 W	80
	135-9003	LED-6/12W/3000K	1454.1 lm	12 W	80
	135-9006	LED-6/12W/4000K	1554.3 lm	12 W	80
	135-9077	LED-6/18W/2700K	2066.4 lm	18 W	80
	135-9017	LED-6/18W/3000K	2167.2 lm	18 W	80
	135-9020	LED-6/18W/4000K	2268 lm	18 W	80