




Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Pre-installation blockout is recommended for mounting in cast concrete ceilings, available on request.

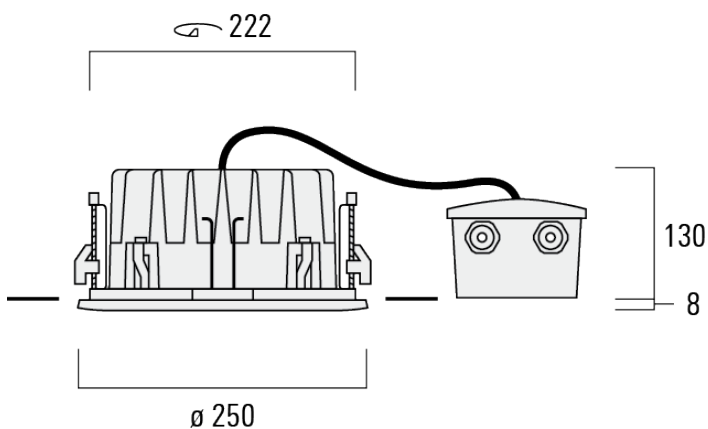

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy								
Lens	Safety glass lens								
Colours	<table><tr><td>RAL9004</td><td>RAL9016</td><td>RAL7016</td><td>RAL9007</td></tr><tr><td>Signal black</td><td>Traffic white</td><td>Anthracite grey</td><td>Grey aluminium</td></tr></table>	RAL9004	RAL9016	RAL7016	RAL9007	Signal black	Traffic white	Anthracite grey	Grey aluminium
RAL9004	RAL9016	RAL7016	RAL9007						
Signal black	Traffic white	Anthracite grey	Grey aluminium						
Gasket	Silicone CCG® Controlled Compression Gasket								
Fasteners	PCS hardware								
Corrosion resistance	5CE								

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---

Additional information

Options**Light distribution Colour temperature Nominal Watt**

[B]




3000K

48 W

72 W



[M]



4000K







[EE]



[EES]

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [B]	135-9102	LED-24/48W/3000K	4593.3 lm	48 W	80
	135-9107	LED-24/48W/4000K	4910.1 lm	48 W	80
	135-9118	LED-24/72W/3000K	8075.4 lm	72 W	80
	135-9121	LED-24/72W/4000K	8451 lm	72 W	80
 [EE]	135-9104	LED-24/48W/3000K	5573.8 lm	48 W	80
	135-9109	LED-24/48W/4000K	5958.2 lm	48 W	80
	135-9120	LED-24/72W/3000K	8662.6 lm	72 W	80
	135-9123	LED-24/72W/4000K	9065.5 lm	72 W	80
 [EES]	135-9105	LED-24/48W/3000K	5971.7 lm	48 W	80
	135-9110	LED-24/48W/4000K	6383.5 lm	48 W	80
 [M]	135-9103	LED-24/48W/3000K	5816.3 lm	48 W	80
	135-9108	LED-24/48W/4000K	6217.4 lm	48 W	80
	135-9119	LED-24/72W/3000K	8668.8 lm	72 W	80
	135-9122	LED-24/72W/4000K	9072 lm	72 W	80