


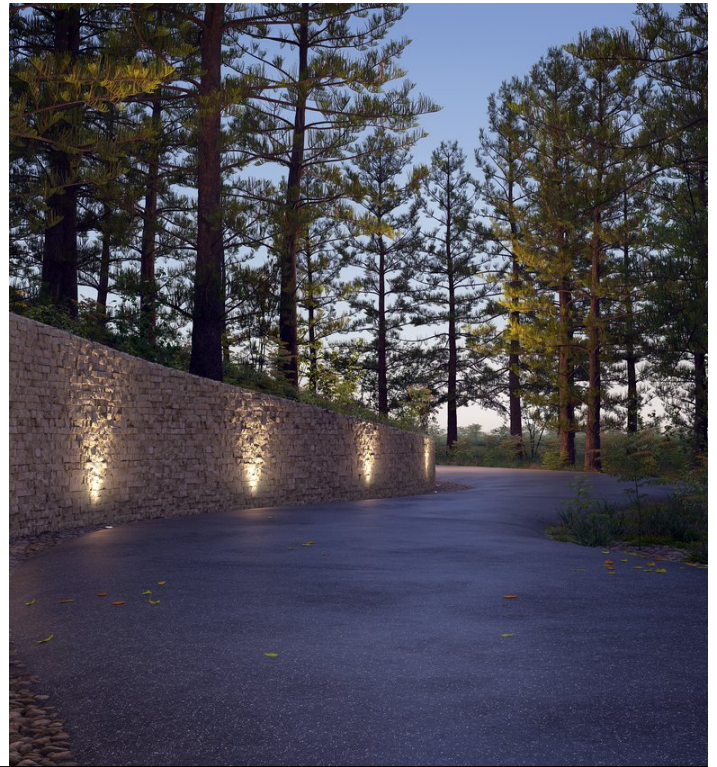

Inground Luminaires

ETC210-TB

IP66/67, Class III. IK09. Stainless steel construction including PCS hardware. Silicone gasket. Safety glass lens; max. load 2.5 tonnes. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 1.5 m of flexible PVC free cable. Integral EC electronic converter in thermally separated compartment. 'No tool' removable gear/lens tray. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Gimbal mounted, 0-30° tiltable, external adjustable when installed. PCA version available on request.

The optional installation blackout is recommended for mounting. To be ordered separately.

The luminaire is not suitable for permanent underwater operation and must be switched off in the event of flooding.

Optional with Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10) available on request.

Gimbal
Variant

3 W
Wattage

227 - 395 lm
Rated lumens

IP66/67 / IK09
IP / IK

Lighting


Light distribution

Colour temperature

Wattage

	[M] symmetric, medium beam		2200K	3 W
	[EES] symmetric, very narrow beam, sharp cut-off		2700K	
	[B] symmetric, wide beam		3000K	
	[EE] symmetric, very narrow beam			

Physical description



Depth	180 mm
Diameter	98 mm
Weight	0.75 kg
Body	Stainless steel construction
Lens	Safety glass lens; max. load 2.5 tonnes
Colours	Stainless Steel
Finish	Stainless steel
Gasket	CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Mounting	Optional installation blockout is recommended for mounting. To be ordered separately.
Ingress protection	IP66/67
Impact resistance	IK09

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Cable	1.5 m of flexible PVC free cable
Surge protection	1/2 kV

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	185-4053	LED-1/3W/2200K	226.7 lm	5.5 W	80
	185-4054	LED-1/3W/2700K	314.5 lm	5.5 W	80
	185-4055	LED-1/3W/3000K	340.1 lm	5.5 W	80
[B] symmetric, wide beam					
	185-4063	LED-1/3W/2200K	263.3 lm	5.5 W	80
	185-4064	LED-1/3W/2700K	365.2 lm	5.5 W	80
	185-4065	LED-1/3W/3000K	394.9 lm	5.5 W	80
[EE] symmetric, very narrow beam					
	185-4068	LED-1/3W/2700K	256.8 lm	5.5 W	90
	185-4069	LED-1/3W/3000K	270.8 lm	5.5 W	90
[EES] symmetric, very narrow beam, sharp cut-off					
	185-4058	LED-1/3W/2200K	254.8 lm	5.5 W	80
	185-4059	LED-1/3W/2700K	353.4 lm	5.5 W	80
	185-4060	LED-1/3W/3000K	382.2 lm	5.5 W	80
[M] symmetric, medium beam					

Inground Luminaires

ETC210-TB

we-ef

A Fagerhult Group Company

WE-EF LEUCHTEN GmbH
Töpinger Straße 16, 29646 Bispingen, Germany
Phone: +49 5194 909-0
info@we-ef.com
<https://we-ef.com>

Subject to technical changes and errors.
