Inground Luminaires

ETC320-FS LED

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 1.2 meters of flexible, PVC-free cable.
Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD- optimised optics for superior illumination and glare control.
Luminaire requires installation blockout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

IMPORTANT!
Inground blockouts must be installed with effective drainage, watch here: https://vimeo.com/672613058
Please note: Internal accessories are not suitable with A6 distribution lens

Fixed	12 W	1265 – 1737 lm	IP69
Variant	Wattage	Rated lumens	IP / IK

Lighting

Light distribution

[M] symmetric, medium beam

[EE] symmetric, very narrow beam

[B] symmetric, wide beam

[EES] symmetric, very narrow beam, sharp cut-off

Colour temperature

2700K

3000K

4000K

Wattage

12 W

Physical description

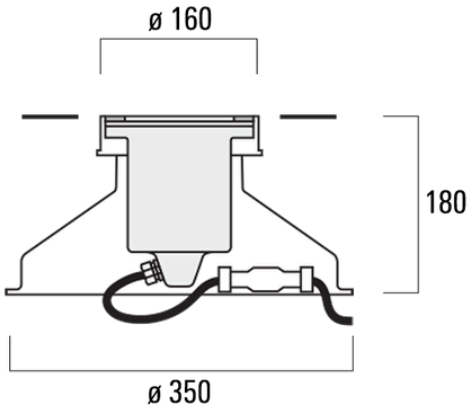

Depth	180 mm
Diameter	160 mm
Weight	4.6 kg
Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP69

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Cable	Complete with cable gland and 0.5 m of flexible PVC-free cable
Termination	Junction box supplied
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. Warranty void if installed without proper drainage.

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[B] symmetric, wide beam	185-7271	LED-6/12W/2700K	1269.5 lm	14.5 W	80
	185-7689	LED-6/12W/3000K	1363.5 lm	14.5 W	80
	185-7691	LED-6/12W/4000K	1457.5 lm	14.5 W	80
[EE] symmetric, very narrow beam	185-7273	LED-6/12W/2700K	1393.8 lm	14.5 W	80
	185-7273+146-0418	LED-6/12W/2700K	1264.9 lm	14.5 W	80
	185-7273+146-0419	LED-6/12W/2700K	1290.7 lm	14.5 W	80
	185-7118	LED-6/12W/3000K	1497 lm	14.5 W	80
	185-7118+146-0418	LED-6/12W/3000K	1358.6 lm	14.5 W	80
	185-7118+146-0419	LED-6/12W/3000K	1386.3 lm	14.5 W	80
	185-7121	LED-6/12W/4000K	1600.3 lm	14.5 W	80
	185-7121+146-0418	LED-6/12W/4000K	1452.3 lm	14.5 W	80
	185-7121+146-0419	LED-6/12W/4000K	1481.9 lm	14.5 W	80
[EES] symmetric, very narrow beam, sharp cut-off	185-7274	LED-6/12W/2700K	1512.7 lm	14.5 W	80
	185-7274+146-0418	LED-6/12W/2700K	1392.6 lm	14.5 W	80
	185-7274+146-0419	LED-6/12W/2700K	1406.5 lm	14.5 W	80
	185-7690	LED-6/12W/3000K	1624.7 lm	14.5 W	80
	185-7690+146-0418	LED-6/12W/3000K	1495.8 lm	14.5 W	80
	185-7690+146-0419	LED-6/12W/3000K	1510.7 lm	14.5 W	80
	185-7692	LED-6/12W/4000K	1736.8 lm	14.5 W	80
	185-7692+146-0418	LED-6/12W/4000K	1598.9 lm	14.5 W	80
	185-7692+146-0419	LED-6/12W/4000K	1614.9 lm	14.5 W	80
[M] symmetric, medium beam	185-7272	LED-6/12W/2700K	1426.1 lm	14.5 W	80
	185-7117	LED-6/12W/3000K	1531.8 lm	14.5 W	80
	185-7120	LED-6/12W/4000K	1637.4 lm	14.5 W	80

Inground Luminaires

ETC320-FS LED

we-ef

A Fagerhult Group Company

WE-EF LIGHTING Pty Ltd
47 Tarnard Drive, 3195 Braeside, Victoria
Phone: +61 3 8587 0444
Fax: +61 3 8587 0499
info.australia@we-ef.com
https://we-ef.com/aus

Information and specifications subject to change without notice.