Inground Luminaires

ETC330-FS LED

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 1.2 meters of flexible, PVC-free cable.
Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD- optimised optics for superior illumination and glare control.
Luminaire requires installation blockout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

IMPORTANT!
Inground blockouts must be installed with effective drainage, watch here: https://vimeo.com/672613058
Please note: Internal accessories are not suitable with A6 distribution

Fixed	24 W	2450 – 3242 lm	IP69
Variant	Wattage	Rated lumens	IP / IK

Lighting

Light distribution

[EE] symmetric, very narrow beam

[M] symmetric, medium beam

[B] symmetric, wide beam

[EES] symmetric, very narrow beam, sharp cut-off

[A6] asymmetric, wallgrazer

Colour temperature

2700K

3000K

4000K

Wattage

24 W

Physical description

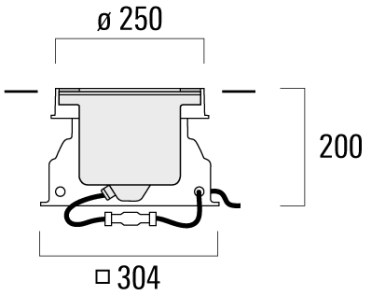

Depth	200 mm
Diameter	250 mm
Weight	6.4 kg
Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP69

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Cable	Complete with cable gland and 0.5 m of flexible PVC-free cable
Termination	Junction box supplied
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. Warranty void if installed without proper drainage.

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [A6] asymmetric, wallgrazer	185-7882	LED-12/24W/2700K	2506.1 lm	27 W	80
	185-7880	LED-12/24W/3000K	2691.7 lm	27 W	80
	185-7881	LED-12/24W/4000K	2877.4 lm	27 W	80
[B] symmetric, wide beam	185-7276	LED-12/24W/2700K	2449.5 lm	27 W	80
	185-7693	LED-12/24W/3000K	2631 lm	27 W	80
	185-7695	LED-12/24W/4000K	2812.4 lm	27 W	80
[EE] symmetric, very narrow beam	185-7278	LED-12/24W/2700K	2654.1 lm	27 W	80
	185-7278+185-7170	LED-12/24W/2700K	2478.4 lm	27 W	80
	185-7278+185-7171	LED-12/24W/2700K	2489.2 lm	27 W	80
	185-7032	LED-12/24W/3000K	2850.7 lm	27 W	80
	185-7032+185-7170	LED-12/24W/3000K	2662 lm	27 W	80
	185-7032+185-7171	LED-12/24W/3000K	2673.6 lm	27 W	80
	185-7036	LED-12/24W/4000K	3047.3 lm	27 W	80
	185-7036+185-7170	LED-12/24W/4000K	2845.5 lm	27 W	80
	185-7036+185-7171	LED-12/24W/4000K	2857.9 lm	27 W	80
[EES] symmetric, very narrow beam, sharp cut-off	185-7279	LED-12/24W/2700K	2823.9 lm	27 W	80
	185-7279+185-7170	LED-12/24W/2700K	2588.2 lm	27 W	80
	185-7279+185-7171	LED-12/24W/2700K	2666.9 lm	27 W	80
	185-7694	LED-12/24W/3000K	3033.1 lm	27 W	80
	185-7694+185-7170	LED-12/24W/3000K	2779.9 lm	27 W	80
	185-7694+185-7171	LED-12/24W/3000K	2864.5 lm	27 W	80
	185-7696	LED-12/24W/4000K	3242.2 lm	27 W	80
	185-7696+185-7170	LED-12/24W/4000K	2971.7 lm	27 W	80
	185-7696+185-7171	LED-12/24W/4000K	3062 lm	27 W	80
[M] symmetric, medium beam	185-7277	LED-12/24W/2700K	2811.3 lm	27 W	80
	185-7033	LED-12/24W/3000K	3019.6 lm	27 W	80
	185-7037	LED-12/24W/4000K	3227.8 lm	27 W	80

Inground Luminaires

ETC330-FS LED

we-ef

A Fagerhult Group Company

WE-EF LIGHTING Pty Ltd
47 Tarnard Drive, 3195 Braeside, Victoria
Phone: +61 3 8587 0444
Fax: +61 3 8587 0499
info.australia@we-ef.com
https://we-ef.com/aus

Information and specifications subject to change without notice.