


Description

Marker Light.

IP69K. Class I. IK08. Marine-grade, all aluminum construction. Anodized aluminum extrusion. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max static load, 3.3 tons (6,600 lbs) (according to DIN EN 60598-2-13). Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tires, at a weight up to 5.5 tons (11,000 lbs) per wheel. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Linear PMMA LED lens. Integral driver in thermally separated compartment. Factory-installed LED circuit board. LED board can be easily removed for upgrading. 0-10V Dimming. Luminaire is factory-sealed and does not need to be opened during installation.

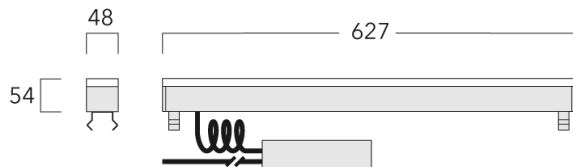

The installation blackout to be ordered separately; blockouts can house between 1-4 luminaires.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must

be specified separately. Example: XXX-XXXX-9004 (Black)+
XXX-XXXX (Accessory 1)

Specifications

Material description

| | |
|--------------------|---|
| Colors | |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Ingress protection | IP67 |
| Impact resistance | IK08 |



Electrical description

| | |
|-------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Electronic converter with 0-10V interface |
| Surge protection | 1/2 kV (optional SP10) |
| Energy efficiency | D (Light source) |

Additional information

| | |
|----------------------------|--|
| Length x Width (inches) | 24.69 x 1.89 |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |
| Lifetime | Ta=25°/40° L90B10 > 90000h |

Options

| Light distribution | Color temperature | Nominal Watt |
|--------------------|---|--------------|
| [] |  3000K | 3 W |
| | | 2 W |
| | R | |
| | G | |
| | B | |
| |  2700K | |

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI |
|--------------------|----------|-----------------|------------------|-------------------|-----|
| □ | 186-0361 | LED-32/2W/R | 65.9 lm | 2 W | 80 |
| | 186-0450 | LED-32/3W/2700K | 131.8 lm | 3 W | 80 |
| | 186-0358 | LED-32/3W/3000K | 131.8 lm | 3 W | 80 |
| | 186-0367 | LED-32/3W/B | 17.6 lm | 3 W | 80 |
| | 186-0364 | LED-32/3W/G | 131.8 lm | 3 W | 80 |