




**Description**

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Including 0.4 m of flexible cable enclosed in a stainless conduit, in-line connector and mounting clamp for installation to RAIL66 mounting system.

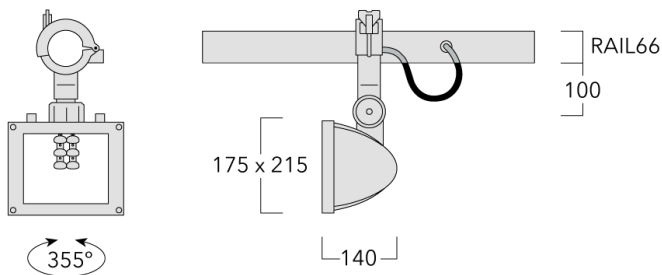

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK08			

### Electrical description


Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------


### Additional information

**Options**

**Light distribution**


 [P65] pedestrian/bicycle lane


 [S70] asymmetric, side throw

 [A60] asymmetric, forward throw

 [R65] rectangular, side throw

**Colour temperature**

 3000K





 4000K

**Nominal Watt**

18 W

26 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [A60] asymmetric, forward throw	161-5956	LED-6/18W/3000K	1468.7 lm	18 W	80
	161-5958	LED-6/18W/4000K	1537 lm	18 W	80
	161-5957	LED-6/26W/3000K	1878.6 lm	26 W	80
	161-5959	LED-6/26W/4000K	1964 lm	26 W	80
 [P65] pedestrian/bicycle lane	161-5948	LED-6/18W/3000K	1523.7 lm	18 W	80
	161-5950	LED-6/18W/4000K	1594.6 lm	18 W	80
	161-5949	LED-6/26W/3000K	1948.9 lm	26 W	80
 [R65] rectangular, side throw	161-5951	LED-6/26W/4000K	2037.5 lm	26 W	80
	161-5952	LED-6/18W/3000K	1457.1 lm	18 W	80
	161-5954	LED-6/18W/4000K	1524.9 lm	18 W	80
	161-5953	LED-6/26W/3000K	1863.7 lm	26 W	80
 [S70] asymmetric, side throw	161-5955	LED-6/26W/4000K	1948.5 lm	26 W	80
	161-5944	LED-6/18W/3000K	1597.1 lm	18 W	80
	161-5946	LED-6/18W/4000K	1671.3 lm	18 W	80
	161-5945	LED-6/26W/3000K	2042.8 lm	26 W	80
	161-5947	LED-6/26W/4000K	2135.6 lm	26 W	80