


Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Including 0.4 m of flexible cable enclosed in a stainless conduit, in-line connector and mounting clamp for installation to RAIL66 mounting system.

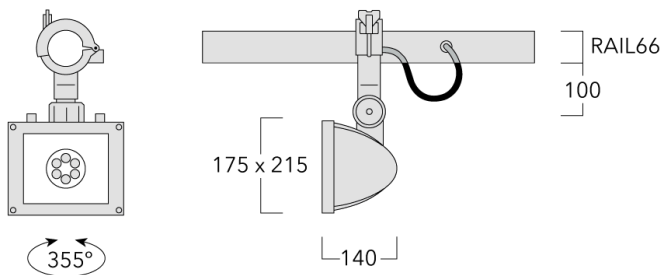

Specifications

Material description

Colours	RAL9004 Signal black	RAL9007 Grey aluminium	RAL7016 Anthracite grey	RAL9016 Traffic white
Ingress protection	IP66			
Impact resistance	IK08			

Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

Options

Light distribution



[B] symmetric, wide beam



[M] symmetric, medium beam




[EE] symmetric, very narrow beam

Colour temperature



3000K






4000K

Nominal Watt

18 W

26 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [B] symmetric, wide beam	161-5932	LED-6/18W/3000K	2018.8 lm	18 W	80
	161-5934	LED-6/18W/4000K	2112.7 lm	18 W	80
	161-5933	LED-6/26W/3000K	2582.2 lm	26 W	80
	161-5935	LED-6/26W/4000K	2699.6 lm	26 W	80
 [EE] symmetric, very narrow beam	161-5940	LED-6/18W/3000K	2165.6 lm	18 W	80
	161-5942	LED-6/18W/4000K	2266.4 lm	18 W	80
	161-5941	LED-6/26W/3000K	2770 lm	26 W	80
	161-5943	LED-6/26W/4000K	2895.9 lm	26 W	80
 [M] symmetric, medium beam	161-5936	LED-6/18W/3000K	2167.2 lm	18 W	80
	161-5938	LED-6/18W/4000K	2268 lm	18 W	80
	161-5937	LED-6/26W/3000K	2772 lm	26 W	80
	161-5939	LED-6/26W/4000K	2898 lm	26 W	80