

Description


RAIL66 system allows for slidable placement.

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Including 1 ft of flexible cable enclosed in a stainless conduit, in-line connector and mounting clamp for installation to RAIL66 mounting system. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Mount permits 355° rotation and 180° tilt.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

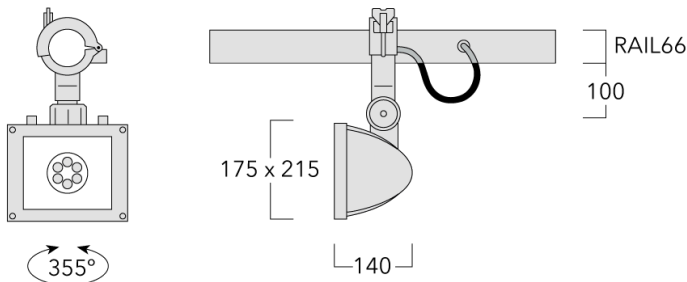

Specifications

Material description

Colors	RAL9004 Signal black	RAL9007 Grey aluminium	RAL9016 Traffic white	RAL8019 Grey brown
Ingress protection	IP66			
Impact resistance	IK08			






Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---




Additional information

Length x Width (inches)	8.46 x 6.89
-------------------------	-------------

Options

Light distribution	Color temperature	Nominal Watt
 [B]	 3000K	18 W 26 W
 [M]	 4000K	
 [EE]		

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [B]	161-5932	LED-6/18W/3000K	2018.8 lm	18 W	80
	161-5934	LED-6/18W/4000K	2112.7 lm	18 W	80
	161-5933	LED-6/26W/3000K	2582.2 lm	26 W	80
	161-5935	LED-6/26W/4000K	2699.6 lm	26 W	80
 [EE]	161-5940	LED-6/18W/3000K	2165.6 lm	18 W	80
	161-5942	LED-6/18W/4000K	2266.4 lm	18 W	80
	161-5941	LED-6/26W/3000K	2770 lm	26 W	80
	161-5943	LED-6/26W/4000K	2895.9 lm	26 W	80
 [M]	161-5936	LED-6/18W/3000K	2167.2 lm	18 W	80
	161-5938	LED-6/18W/4000K	2268 lm	18 W	80
	161-5937	LED-6/26W/3000K	2772 lm	26 W	80
	161-5939	LED-6/26W/4000K	2898 lm	26 W	80