

Description


SPACE FRAME system allows for slidable placement, including terminal box, for mounting on \varnothing 1.9-2.36" pipes or space frames.

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Mount permits 355° rotation and 180° tilt.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

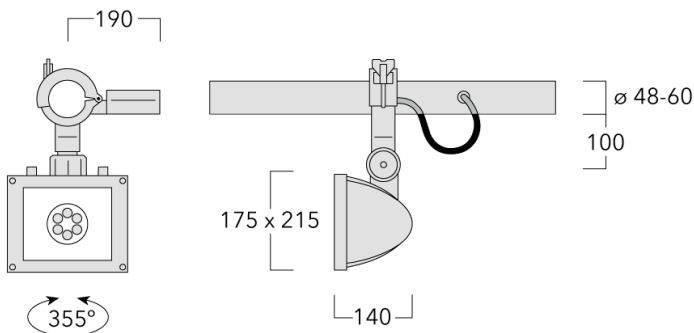

Specifications

Material description






| | | | | |
|--------------------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Colors |  RAL9004 Signal black |  RAL9007 Grey aluminium |  RAL9016 Traffic white |  RAL8019 Grey brown |
| Ingress protection | IP66 | | | |
| Impact resistance | IK08 | | | |

Electrical description




Additional information

| | |
|----------------------------|-------------|
| Length x Width (inches) | 8.46 x 6.89 |
|----------------------------|-------------|

Options

| Light distribution | Color temperature | Nominal Watt |
|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------------|
|  [B] |  3000K | 18 W 26 W |
|  [M] |  4000K | |
|  [EE] | | |

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI |
|-----------------------------------------------------------------------------------------------|----------|-----------------|------------------|-------------------|-----|
|  <p>[B]</p> | 161-5960 | LED-6/18W/3000K | 2018.8 lm | 18 W | 80 |
| | 161-5962 | LED-6/18W/4000K | 2112.7 lm | 18 W | 80 |
| | 161-5961 | LED-6/26W/3000K | 2582.2 lm | 26 W | 80 |
| | 161-5963 | LED-6/26W/4000K | 2699.6 lm | 26 W | 80 |
|  <p>[EE]</p> | 161-5968 | LED-6/18W/3000K | 2165.6 lm | 18 W | 80 |
| | 161-5970 | LED-6/18W/4000K | 2266.4 lm | 18 W | 80 |
| | 161-5969 | LED-6/26W/3000K | 2770 lm | 26 W | 80 |
| | 161-5971 | LED-6/26W/4000K | 2895.9 lm | 26 W | 80 |
|  <p>[M]</p> | 161-5964 | LED-6/18W/3000K | 2167.2 lm | 18 W | 80 |
| | 161-5966 | LED-6/18W/4000K | 2268 lm | 18 W | 80 |
| | 161-5965 | LED-6/26W/3000K | 2772 lm | 26 W | 80 |
| | 161-5967 | LED-6/26W/4000K | 2898 lm | 26 W | 80 |