



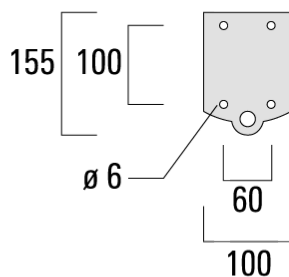

**Description**

IP55. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire.

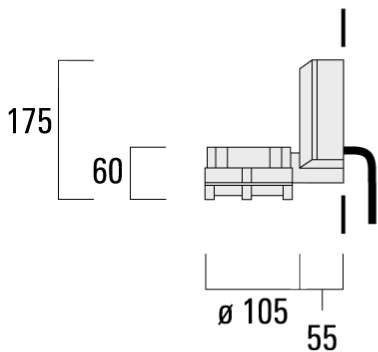

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

## Specifications

### Material description

Body	Luminaire body and lens frame constructed in die-cast aluminum.			
Lens	Clear tempered glass lens.			
Colors	<b>RAL9004</b>	<b>RAL9016</b>	<b>RAL8019</b>	<b>RAL9007</b>
	Signal black	Traffic white	Grey brown	Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket			
Fasteners	PCS polymer coated stainless steel			
Impact resistance	IK07			
Corrosion resistance	5CE			

### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral driver in thermally separated compartment.

### Additional information

Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta less than 25 deg C.

**Options**

**Light distribution**

**Color temperature**

**Nominal Watt**



[M] symmetric, medium beam



[VN] symmetric, very narrow beam







[VNS] symmetric, very narrow beam, sharp cut-off



[W] bi-symmetric, wide beam

0 W

## Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
	145-9374_us		1511.8 lm	0 W	80
	145-9377_us		1616.1 lm	0 W	80
[M] symmetric, medium beam					
	145-9375_us		1496.5 lm	0 W	80
	145-9378_us		1599.7 lm	0 W	80
	145-9384_us		1721.8 lm	0 W	80
[VN] symmetric, very narrow beam					
	145-9382_us		1610.7 lm	0 W	80
[VNS] symmetric, very narrow beam, sharp cut-off					
	145-9383_us		1347.1 lm	0 W	80
	145-9385_us		1440 lm	0 W	80
[W] bi-symmetric, wide beam					