




**Description**

IP66, Class I. IK07. Marine-grade, all-aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Knuckle permits 350° horizontal and 180° vertical aiming of optics.

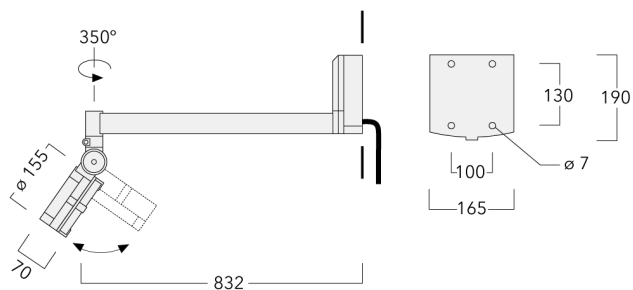

## Specifications

### Material description

---

Body	Marine-grade, die-cast aluminium alloy						
Lens	Safety glass lens						
Colours	<table><tr><td><b>RAL9004</b></td><td><b>RAL9006</b></td><td><b>RAL9007</b></td></tr><tr><td>Signal black</td><td>White aluminium</td><td>Grey aluminium</td></tr></table>	<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>	Signal black	White aluminium	Grey aluminium
<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>					
Signal black	White aluminium	Grey aluminium					
Gasket	Silicone CCG® Controlled Compression Gasket						
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)						
Ingress protection	IP55						
Impact resistance	IK07						
Corrosion resistance	5CE+Primer						

---

### Electrical description

---

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

---

### Additional information

---

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------





---




**Options**

**Light distribution**

**Colour temperature**





**Nominal Watt**

- 
[M] symmetric, medium beam
- 
[EES] symmetric, very narrow beam, sharp cut-off
- 
[B] symmetric, wide beam
- 
[EE] symmetric, very narrow beam

- 
3000K
- 
4000K
- 
2700K

24 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	146-0972	LED-12/24W/2700K	2522.3 lm	24 W	80
	146-0512	LED-12/24W/3000K	2709.2 lm	24 W	80
	146-0513	LED-12/24W/4000K	2896 lm	24 W	80
[B] symmetric, wide beam					
	146-0974	LED-12/24W/2700K	2684.8 lm	24 W	80
	146-0515	LED-12/24W/3000K	2883.7 lm	24 W	80
	146-0516	LED-12/24W/4000K	3082.5 lm	24 W	80
[EE] symmetric, very narrow beam					
	146-0975	LED-12/24W/2700K	2865.6 lm	24 W	80
	146-0408	LED-12/24W/3000K	3077.9 lm	24 W	80
	146-0409	LED-12/24W/4000K	3290.2 lm	24 W	80
[EES] symmetric, very narrow beam, sharp cut-off					
	146-0973	LED-12/24W/2700K	2791.8 lm	24 W	80
	146-0405	LED-12/24W/3000K	2998.6 lm	24 W	80
	146-0406	LED-12/24W/4000K	3205.4 lm	24 W	80
[M] symmetric, medium beam					