




Description

IP55, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Optional 2200 K version available.

Knuckle permits 350° horizontal and 90° vertical aiming of optics.

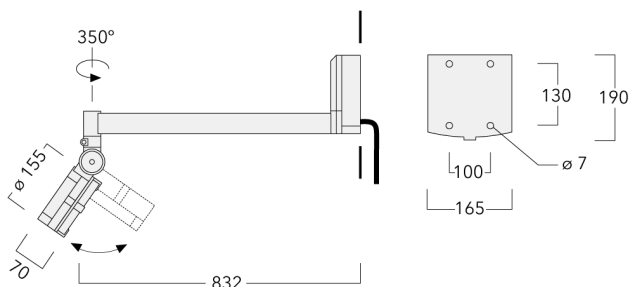

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	RAL9004	RAL9006	RAL9016	RAL7016
	Signal black	White aluminium	Traffic white	Anthracite grey
	RAL9007			
	Grey aluminium			
Gasket	Silicone CCG® Controlled Compression Gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP55			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information





Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------




Options

Light distribution

Colour temperature





Nominal Watt

- 
[M] symmetric, medium beam
- 
[EES] symmetric, very narrow beam, sharp cut-off
- 
[B] symmetric, wide beam
- 
[EE] symmetric, very narrow beam

- 
3000K
- 
4000K
- 
2700K

24 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	146-0972	LED-12/24W/2700K	2522.3 lm	24 W	80
	146-0512	LED-12/24W/3000K	2709.2 lm	24 W	80
	146-0513	LED-12/24W/4000K	2896 lm	24 W	80
[B] symmetric, wide beam					
	146-0974	LED-12/24W/2700K	2684.8 lm	24 W	80
	146-0515	LED-12/24W/3000K	2883.7 lm	24 W	80
	146-0516	LED-12/24W/4000K	3082.5 lm	24 W	80
[EE] symmetric, very narrow beam					
	146-0975	LED-12/24W/2700K	2865.6 lm	24 W	80
	146-0408	LED-12/24W/3000K	3077.9 lm	24 W	80
	146-0409	LED-12/24W/4000K	3290.2 lm	24 W	80
[EES] symmetric, very narrow beam, sharp cut-off					
	146-0973	LED-12/24W/2700K	2791.8 lm	24 W	80
	146-0405	LED-12/24W/3000K	2998.6 lm	24 W	80
	146-0406	LED-12/24W/4000K	3205.4 lm	24 W	80
[M] symmetric, medium beam					