




Description

IP66, Class I. IK07. Marine-grade, all-aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Knuckle permits 350° horizontal and 180° vertical aiming of optics.

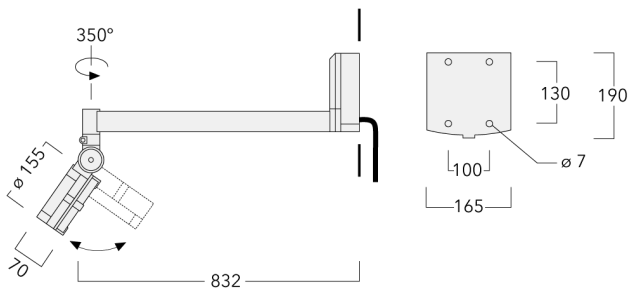

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy		
Lens	Safety glass lens		
Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket		
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)		
Ingress protection	IP55		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

Electrical description








Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Additional information





Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

Options

Light distribution Colour temperature Nominal Watt

 [M]	 3000K	24 W
 [EES]	 4000K	
 [B]	 2700K	
 [EE]		

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	146-0972	LED-12/24W/2700K	2522.3 lm	24 W	80
	146-0512	LED-12/24W/3000K	2709.2 lm	24 W	80
	146-0513	LED-12/24W/4000K	2896 lm	24 W	80
[B]					
	146-0974	LED-12/24W/2700K	2684.8 lm	24 W	80
	146-0974	LED-12/24W/2700K	2684.8 lm	24 W	80
	146-0515	LED-12/24W/3000K	2883.7 lm	24 W	80
	146-0515	LED-12/24W/3000K	2883.7 lm	24 W	80
	146-0516	LED-12/24W/4000K	3082.5 lm	24 W	80
[EE]					
	146-0975	LED-12/24W/2700K	2865.6 lm	24 W	80
	146-0975	LED-12/24W/2700K	2865.6 lm	24 W	80
	146-0408	LED-12/24W/3000K	3077.9 lm	24 W	80
	146-0408	LED-12/24W/3000K	3077.9 lm	24 W	80
	146-0409	LED-12/24W/4000K	3290.2 lm	24 W	80
[EES]					
	146-0973	LED-12/24W/2700K	2791.8 lm	24 W	80
	146-0973	LED-12/24W/2700K	2791.8 lm	24 W	80
	146-0405	LED-12/24W/3000K	2998.6 lm	24 W	80
	146-0405	LED-12/24W/3000K	2998.6 lm	24 W	80
	146-0406	LED-12/24W/4000K	3205.4 lm	24 W	80
[M]					
	146-0406	LED-12/24W/4000K	3205.4 lm	24 W	80