




Description

IP55, Class I. IK07. Marine-grade, all-aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Knuckle permits 350° horizontal and 180° vertical aiming of optics.

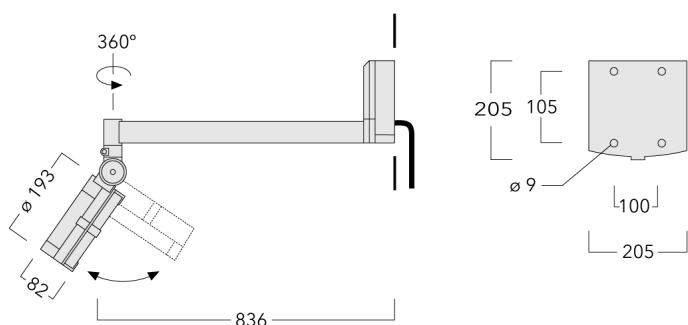

Specifications

Material description

Body	Marine-grade, all-aluminium construction			
Lens	Safety glass lens			
Colours	RAL9004	RAL9016	RAL7016	RAL9007
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket			
Fasteners	PCS hardware			
Ingress protection	IP55			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information





Listings	Knuckle permits 350° horizontal and 180° vertical aiming of optics
Lifetime	Ta=25° L90B10 > 90000h

Options

Light distribution Colour temperature Nominal Watt

	[M]		3000K	48 W
	[EES]		4000K	
	[B]		2700K	
	[EE]			

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	146-0976	LED-24/48W/2700K	5016.9 lm	48 W	80
	146-7066	LED-24/48W/3000K	5388.5 lm	48 W	80
	146-7067	LED-24/48W/4000K	5760.1 lm	48 W	80
[B]					
	146-0978	LED-24/48W/2700K	5573.3 lm	48 W	80
	146-0978	LED-24/48W/2700K	5573.3 lm	48 W	80
	146-7068	LED-24/48W/3000K	5986.1 lm	48 W	80
	146-7068	LED-24/48W/3000K	5986.1 lm	48 W	80
	146-7069	LED-24/48W/4000K	6398.9 lm	48 W	80
	146-7069	LED-24/48W/4000K	6398.9 lm	48 W	80
[EE]					
	146-0979	LED-24/48W/2700K	5998.4 lm	48 W	80
	146-0979	LED-24/48W/2700K	5998.4 lm	48 W	80
	146-7056	LED-24/48W/3000K	6442.7 lm	48 W	80
	146-7056	LED-24/48W/3000K	6442.7 lm	48 W	80
	146-7057	LED-24/48W/4000K	6887 lm	48 W	80
	146-7057	LED-24/48W/4000K	6887 lm	48 W	80
[EES]					
	146-0977	LED-24/48W/2700K	5630.1 lm	48 W	80
	146-0977	LED-24/48W/2700K	5630.1 lm	48 W	80
	146-7054	LED-24/48W/3000K	6047.2 lm	48 W	80
	146-7054	LED-24/48W/3000K	6047.2 lm	48 W	80
	146-7055	LED-24/48W/4000K	6464.2 lm	48 W	80
	146-7055	LED-24/48W/4000K	6464.2 lm	48 W	80
[M]					