






Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board.

Including 0,4 m of flexible cable enclosed in stainless conduit, in-line connector and mounting clamp for installation to RAIL66 mounting system.

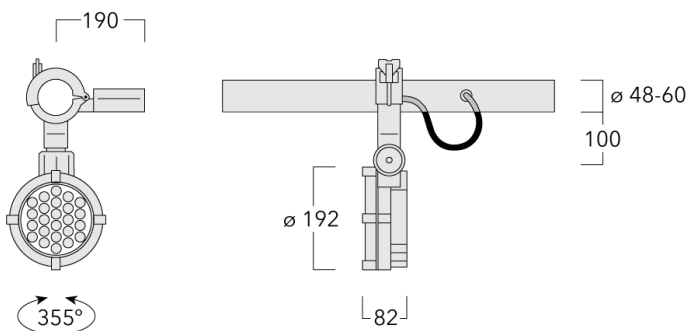

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9016 Traffic white	RAL7016 Anthracite grey
	RAL9007 Grey aluminium			
Gasket	Silicone rubber gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)

Additional information





Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------




Options

Light distribution

Colour temperature





Nominal Watt

- 
[M] symmetric, medium beam
- 
[EES] symmetric, very narrow beam, sharp cut-off
- 
[B] symmetric, wide beam
- 
[EE] symmetric, very narrow beam

- 
3000K
- 
4000K
- 
2700K

48 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	146-0984	LED-24/48W/2700K	5016.9 lm	48 W	80
	146-7070	LED-24/48W/3000K	5388.5 lm	48 W	80
	146-7071	LED-24/48W/4000K	5760.1 lm	48 W	80
[B] symmetric, wide beam					
	146-0986	LED-24/48W/2700K	5573.3 lm	48 W	80
	146-7072	LED-24/48W/3000K	5986.1 lm	48 W	80
	146-7073	LED-24/48W/4000K	6398.9 lm	48 W	80
[EE] symmetric, very narrow beam					
	146-0987	LED-24/48W/2700K	5998.4 lm	48 W	80
	146-7060	LED-24/48W/3000K	6442.7 lm	48 W	80
	146-7061	LED-24/48W/4000K	6887 lm	48 W	80
[EES] symmetric, very narrow beam, sharp cut-off					
	146-0985	LED-24/48W/2700K	5630.1 lm	48 W	80
	146-7058	LED-24/48W/3000K	6047.2 lm	48 W	80
	146-7059	LED-24/48W/4000K	6464.2 lm	48 W	80
[M] symmetric, medium beam					