




**Description**

IP66, Class I. IK07. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket Safety glass lens. PMMA-LED lens array. Remote 240v gear to be ordered separately.

2700 K option available on request.

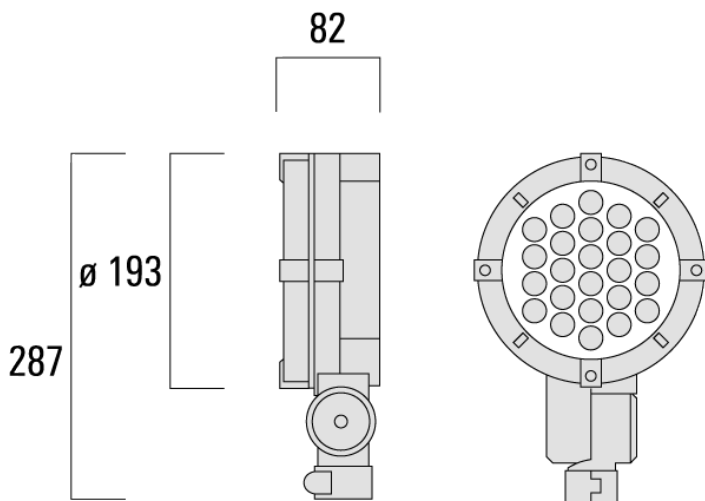

## Specifications

### Material description

---

Body	Marine-grade die-cast aluminium alloy						
Lens	Safety glass lens						
Colours	<table><tr><td><b>RAL9004</b></td><td><b>RAL9006</b></td><td><b>RAL9007</b></td></tr><tr><td>Signal black</td><td>White aluminium</td><td>Grey aluminium</td></tr></table>	<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>	Signal black	White aluminium	Grey aluminium
<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>					
Signal black	White aluminium	Grey aluminium					
Gasket	Silicone CCG® Controlled Compression Gasket						
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)						
Ingress protection	IP66						
Impact resistance	IK07						
Corrosion resistance	5CE+Primer						

---

### Electrical description







---

Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.
-------------------	--





---

### Additional information

**Options**

Light distribution	Colour temperature	Nominal Watt
 [B]	 3000K	48 W
 [M]	 4000K	
 [EE]	RGBW	
 [EES]		

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	146-0573	LED-24/48W/3000K	5388.5 lm	48 W	80
	146-0574	LED-24/48W/4000K	5760.1 lm	48 W	80
	146-8574	LED-24/48W/RGBW	2666.8 lm	48 W	80
[B]					
	146-0579	LED-24/48W/3000K	5986.1 lm	48 W	80
	146-0579	LED-24/48W/3000K	5986.1 lm	48 W	80
	146-0580	LED-24/48W/4000K	6398.9 lm	48 W	80
	146-0580	LED-24/48W/4000K	6398.9 lm	48 W	80
[EE]					
	146-8575	LED-24/48W/RGBW	2921.6 lm	48 W	80
	146-0582	LED-24/48W/3000K	6442.7 lm	48 W	80
	146-0582	LED-24/48W/3000K	6442.7 lm	48 W	80
	146-0583	LED-24/48W/4000K	6887 lm	48 W	80
	146-0583	LED-24/48W/4000K	6887 lm	48 W	80
[EES]					
	146-0576	LED-24/48W/3000K	6047.2 lm	48 W	80
	146-0577	LED-24/48W/4000K	6464.2 lm	48 W	80
	146-8576	LED-24/48W/RGBW	2963.9 lm	48 W	80
[M]					