


Description

Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system.

IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 10 ft. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

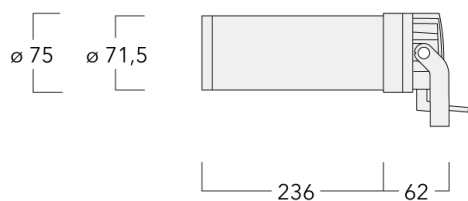

Specifications

Material description

Colours

RAL9004

Signal black

RAL9006

White aluminium

RAL9007

Grey aluminium

Ingress protection IP66

Impact resistance IK07

Electrical description

Power supply 220-240V / 50-60 Hz


Energy efficiency D-E (Light source)

Additional information

Lifetime Ta=40° L90B10 > 90000h


Options

Light distribution **Colour temperature** **Nominal Watt**



6 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[FP]</p>	139-2752	LED-1/6W/2700K	394.6 lm	6 W	80
	139-2752	LED-1/6W/2700K	373.3 lm	6 W	80
	139-2753	LED-1/6W/3000K	394.6 lm	6 W	80
	139-2753	LED-1/6W/3000K	373.3 lm	6 W	80
	139-2754	LED-1/6W/4000K	424 lm	6 W	80
	139-2754	LED-1/6W/4000K	401.1 lm	6 W	80