




Description

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately.

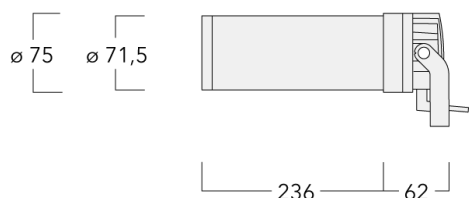

IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 10 ft. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

Gobo outside diameter 37.5 mm, max. printable area $d = 28$ mm.

Specifications

Material description

Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9007 Grey aluminium
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

Electrical description

Power supply	220-240V / 50-60 Hz
Energy efficiency	D-E (Light source)

Additional information

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

Options

Light distribution



[GP] symmetric Gobo-Projector

Colour temperature

Nominal Watt



2700K




3000K



4000K

6 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [GP] symmetric Gobo-Projector	139-2749	LED-1/6W/2700K	286.9 lm	6 W	80
	139-2749	LED-1/6W/2700K	167 lm	6 W	80
	139-2750	LED-1/6W/3000K	286.9 lm	6 W	80
	139-2750	LED-1/6W/3000K	167 lm	6 W	80
	139-2751	LED-1/6W/4000K	308.3 lm	6 W	80
	139-2751	LED-1/6W/4000K	179.5 lm	6 W	80