




**Description**

IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens.

Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 3.0 m. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board. Tunable White Technology. DALI interface.

Maximum one internal optical accessory possible. To be specified at time of ordering.

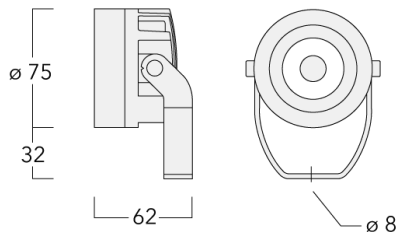

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DALI
Energy efficiency	D (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**



[B] symmetric, wide beam

2200-6000K

4 W






[M] symmetric, medium beam



[E] symmetric, narrow beam

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[B] symmetric, wide beam</p>	139-2450	LED-1/4W/2200-6000K	317.8 lm	4 W	80
 <p>[E] symmetric, narrow beam</p>	139-2452	LED-1/4W/2200-6000K	326.9 lm	4 W	80
 <p>[M] symmetric, medium beam</p>	139-2451	LED-1/4W/2200-6000K	321.1 lm	4 W	80