




Description

Tunable White. IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 10 ft. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board. Tunable White Technology. DALI interface.

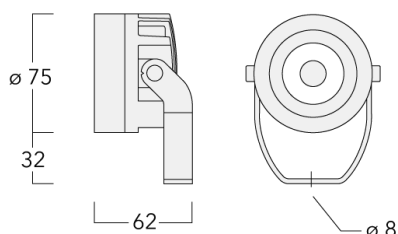

Maximum one internal optical accessory possible. To be specified at time of ordering.

Specifications

Material description

Colours	RAL9004	RAL9006	RAL9007	RAL7016
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	RAL9016			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DALI
Energy efficiency	D (Light source)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Options**Light distribution** **Colour temperature** **Nominal Watt**

[B]

2200-6000K

4 W






[M]



[E]

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[B]</p>	139-2450	LED-1/4W/2200-6000K	317.8 lm	4 W	80
 <p>[E]</p>	139-2452	LED-1/4W/2200-6000K	326.9 lm	4 W	80
 <p>[M]</p>	139-2451	LED-1/4W/2200-6000K	321.1 lm	4 W	80