




**Description**

Tunable White. IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG<sup>®</sup> Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 3.0 m. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board. Tunable White Technology. DALI interface.

Maximum one internal optical accessory possible. To be specified at time of ordering.

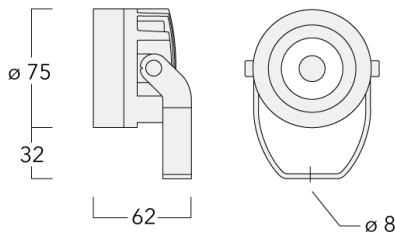

## Specifications

### Material description

---

Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

---

### Electrical description

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DALI
Energy efficiency	D (Light source)

---

### Additional information

---

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

---

**Options**

Light distribution	Colour temperature	Nominal Watt
--------------------	--------------------	--------------



[B]

2200-6000K

4 W






[M]



[E]

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [B]	139-2450	LED-1/4W/2200-6000K	317.8 lm	4 W	80
 [E]	139-2452	LED-1/4W/2200-6000K	326.9 lm	4 W	80
 [M]	139-2451	LED-1/4W/2200-6000K	321.1 lm	4 W	80