


Description

Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system.

IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 10 ft. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

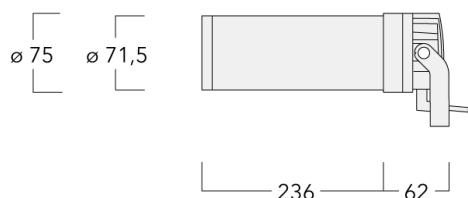

Specifications

Material description

Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9007 Grey aluminium
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

Electrical description

Power supply	220-240V / 50-60 Hz
Energy efficiency	D-E (Light source)

Additional information

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

Options

Light distribution



[ZP] symmetric Zoom-Projector


Colour temperature



2700K



3000K




4000K

Nominal Watt

6 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP] symmetric Zoom-Projector</p>	139-2746	LED-1/6W/2700K	394.6 lm	6 W	80
	139-2746	LED-1/6W/2700K	373.3 lm	6 W	80
	139-2747	LED-1/6W/3000K	394.6 lm	6 W	80
	139-2747	LED-1/6W/3000K	373.3 lm	6 W	80
	139-2748	LED-1/6W/4000K	424 lm	6 W	80
	139-2748	LED-1/6W/4000K	401.1 lm	6 W	80