




**Description**

RGBW/RGBA Colour Changer Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system. RGBW (white in 4000 K, 3000 K available on request) and RGBA.

IP66, Class I. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request.

Electronic control gear in separate gearbox (medium), prewired. Glass LED lens array. Factory installed LED circuit board. DMX interface.

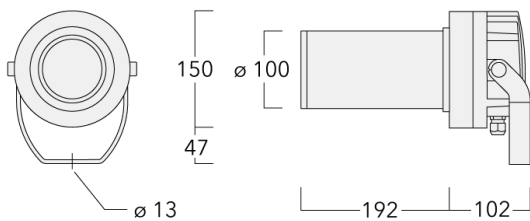

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK05			

### Electrical description

Power supply	220-240V / 50-60 Hz
Surge protection	6/6 kV (optional SP10 in separate gearbox, large)
Energy efficiency	G (Light source)

### Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[FP] symmetric Framing-Projector

4000K+RGBW

15 W

RGBA

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[FP] symmetric Framing-Projector</p>	139-2490	LED-1/15W/4000K+RGBW	381.2 lm	15 W	80
	139-2490	LED-1/15W/4000K+RGBW	572.1 lm	15 W	80
	139-2491	LED-1/15W/RGBA	352.6 lm	15 W	80
	139-2491	LED-1/15W/RGBA	529.2 lm	15 W	80