Projectors

FLC210-CC LED [GP]

RGBW/RGBA Colour Changer Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately.

IP66, Class III. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Electronic control gear in separate gearbox (medium), prewired. Glass LED lens array. Factory installed LED circuit board. DMX interface.

Gobo outside diameter 46.6 mm, max. printable area d = 38 mm.

15 W	187 – 315 lm	IP66 / IK05
Wattage	Rated lumens	IP / IK

Lighting

Light distribution	Colour temperature	Wattage
[GP] symmetric Gobo-Projector	RGBW+4000K	15 W
	RGBA	

Physical description

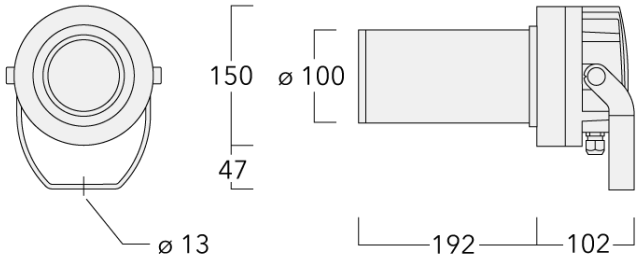

Diameter	150 mm
Weight	4 kg
Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	**RAL9004** Signal black; **RAL9006** White aluminium; **RAL9007** Grey aluminium; **RAL7016** Anthracite grey; **RAL9016** Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK05
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DMX (separate gearbox)
Cable	One cable entry, second cable entry on request
Surge protection	6/6 kV (optional SP10 in separate gearbox, large)
Energy efficiency	G (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[GP] symmetric Gobo-Projector	139-2488_min	LED-FT-15W/RGBA	186.8 lm	17 W	80
	139-2488_max	LED-FT-15W/RGBA	291.2 lm	17 W	80
	139-2487_min	LED-FT-15W/RGBW+4000K	202 lm	17 W	80
	139-2487_max	LED-FT-15W/RGBW+4000K	314.8 lm	17 W	80

Projectors

FLC210-CC LED [GP]

we-ef

A Fagerhult Group Company

WE-EF LEUCHTEN GmbH
Töpinger Straße 16, 29646 Bispingen, Germany
Phone: +49 5194 909-0
info@we-ef.com
https://we-ef.com

Subject to technical changes and errors.