




**Description**

RGBW/RGBA Colour Changer Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately.

IP66, Class III. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Electronic control gear in separate gearbox (medium), prewired. Glass LED lens array. Factory installed LED circuit board. DMX interface.

Gobo outside diameter 46.6 mm, max. printable area d = 38 mm.

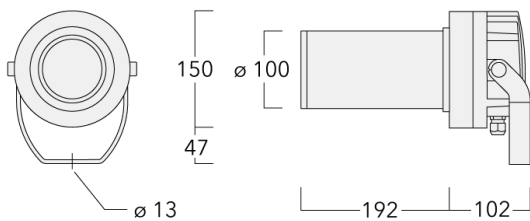

## Specifications

### Material description

|                    |                |                 |                |                 |
|--------------------|----------------|-----------------|----------------|-----------------|
| Colours            | <b>RAL9004</b> | <b>RAL9006</b>  | <b>RAL9007</b> | <b>RAL7016</b>  |
|                    | Signal black   | White aluminium | Grey aluminium | Anthracite grey |
|                    | <b>RAL9016</b> |                 |                |                 |
|                    | Traffic white  |                 |                |                 |
| Ingress protection | IP66           |                 |                |                 |
| Impact resistance  | IK05           |                 |                |                 |

### Electrical description

|                   |   |
|-------------------|---|
| Power supply      | 220-240V / 50-60 Hz                               |
| Surge protection  | 6/6 kV (optional SP10 in separate gearbox, large) |
| Energy efficiency | G (Light source)                                  |

### Additional information

|          |                        |
|----------|------------------------|
| Lifetime | Ta=25° L70B50 > 50000h |
|----------|------------------------|

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**




[GP]

4000K+RGBW

15 W

RGBA

### Configurations

| Light distribution  | Part ID  | Light source         | Rated lumens | Rated input power | CRI |
|---|----------|----------------------|--------------|-------------------|-----|
|  <p>[GP]</p> | 139-2487 | LED-1/15W/4000K+RGBW | 202 lm       | 15 W              | 80  |
|   | 139-2487 | LED-1/15W/4000K+RGBW | 314.8 lm     | 15 W              | 80  |
|   | 139-2488 | LED-1/15W/RGBA       | 186.8 lm     | 15 W              | 80  |
|   | 139-2488 | LED-1/15W/RGBA       | 291.2 lm     | 15 W              | 80  |