




**Description**

RGBW/RGBA Colour Changer Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately.

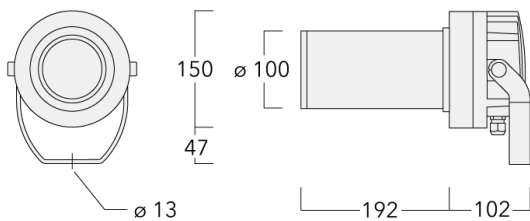

IP66, Class III. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Electronic control gear in separate gearbox (medium), prewired. Glass LED lens array. Factory installed LED circuit board. DMX interface.

Gobo outside diameter 46.6 mm, max. printable area d = 38 mm.

## Specifications

### Material description

---

Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium
Ingress protection	IP66		
Impact resistance	IK05		

---

### Electrical description

---

Power supply	220-240V / 50-60 Hz
Surge protection	6/6 kV (optional SP10 in separate gearbox, large)
Energy efficiency	G (Light source)

---

### Additional information

---

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------

---

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**




[GP]

4000K+RGBW

15 W

RGBA

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[GP]</p>	139-2487	LED-1/15W/4000K+RGBW	202 lm	15 W	80
	139-2487	LED-1/15W/4000K+RGBW	314.8 lm	15 W	80
	139-2488	LED-1/15W/RGBA	186.8 lm	15 W	80
	139-2488	LED-1/15W/RGBA	291.2 lm	15 W	80